


APP CRS	Rwy Idg	7002
224°	TDZE	12
	Apt Elev	21

RNAV (RNP) Z RWY 22

LAGUARDIA (LGA)

RNP AR APCH - GPS. RF required.		ALSIF-1 	MISSED APPROACH: Climb to 3000 direct PROUD and hold, continue climb-in-hold to 3000. *Missed approach requires minimum climb of 397 feet per NM to 560.
 NA	For uncompensated Baro-VNAV systems, procedure NA below -11°C or above 54°C. For inop ALS, increase RNP 0.30 DA* visibility to RVR 5500.		

D-ATIS ARR	125.95	NEW YORK APP CON		LAGUARDIA TOWER		GND CON		CLNC DEL		CPDLC
D-ATIS DEP	127.05	120.8 263.0		118.7 263.0		121.7 263.0		135.2		

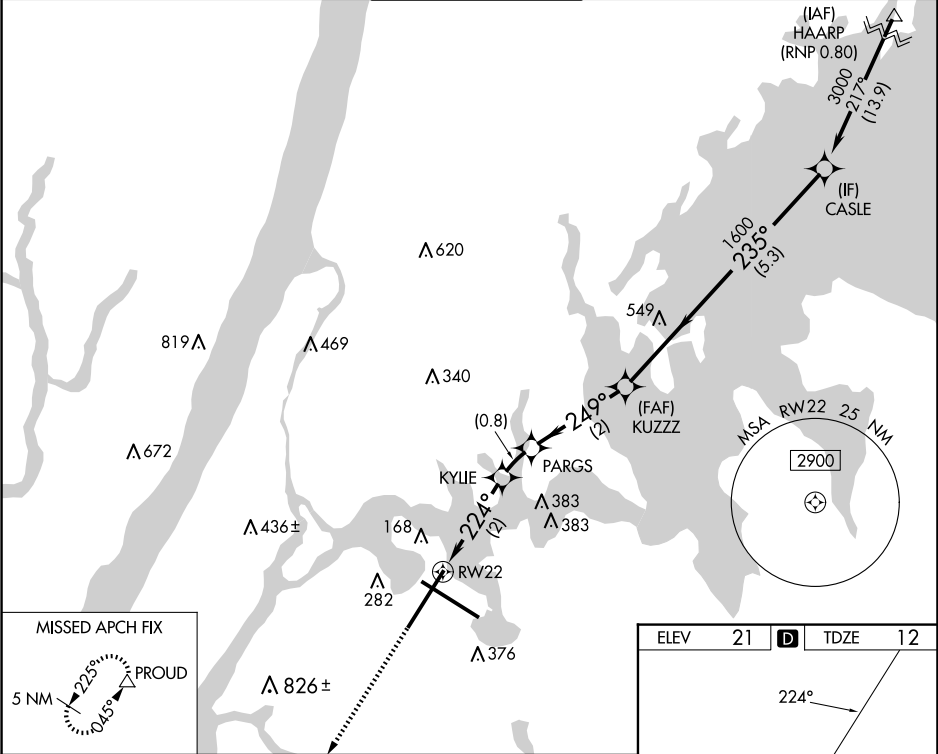

3000	PROUD	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).			
		KUZZZ	CASLE		
		PARGS			
		KYLIE			
		947			
		704			
			1600		
			235°		
			249°		
			224°		
			1600		
			GP 3.00°		
			TCH 52		
			2 NM	0.8 NM	2 NM
			5.3 NM		
CATEGORY		A	B	C	D
RNP 0.30 DA*		384/35	372 (400-¾)		
RNP 0.30 DA		445/40	433 (500-¾)		

