

NORFOLK, VIRGINIA

AL-291 (FAA)

25163

APP CRS
227°

Rwy Ldg	8995
TDZE	26
Apt Elev	27

RNAV (RNP) Y RWY 23
NORFOLK INTL (ORF)

T For uncompensated Baro-VNAV systems, procedure NA below -9°C (16°F) or above 54°C (130°F). GPS required. For inop ALS, increase RNP 0.10 DA visibility all Cats to 1½ SM, increase RNP 0.30 DA visibility all Cats to 1¾ SM.

MALSR



MISSED APPROACH: Climb to 2000 on track 227° to CALEY and hold.

ATIS
127.15


NORFOLK APP CON
118.9 353.7

NORFOLK TOWER
120.8 257.8


GND CON
121.9

CLNC DEL
118.5

RADAR REQUIRED

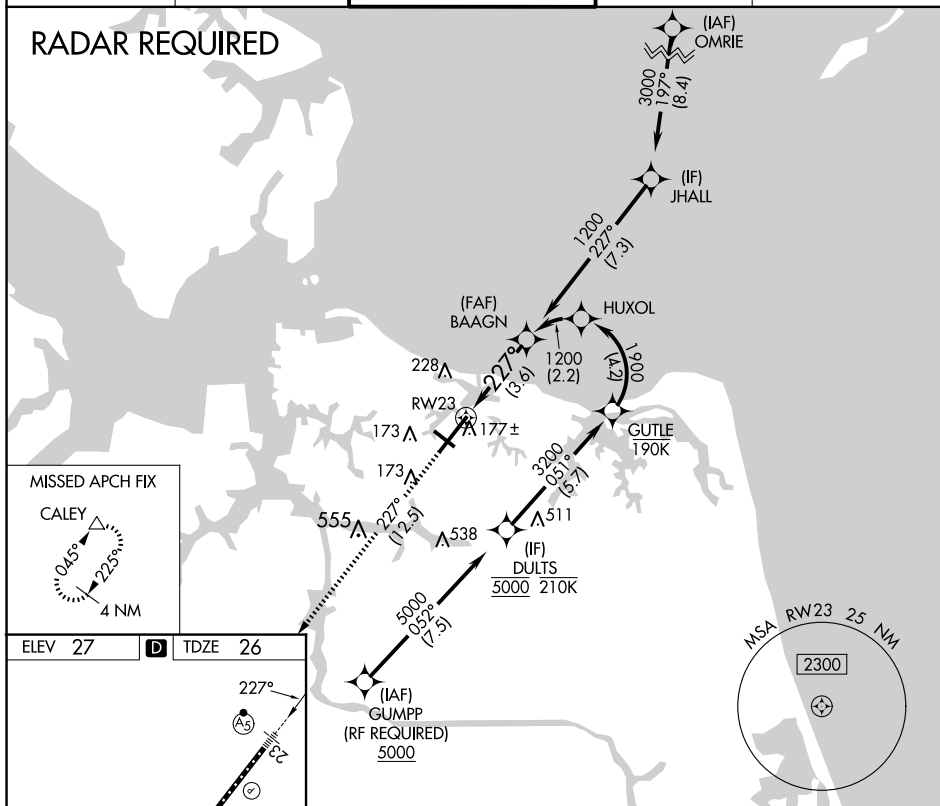


MISSED APCH FIX



ELEV 27

D TDZE 26

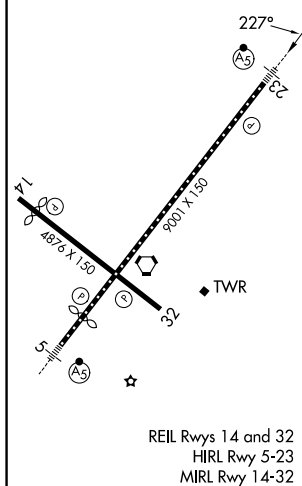

REIL Rwys 14 and 32
HIRL Rwy 5-23
MIRL Rwy 14-32

2000
↑

CALEY
△

See planview for multiple IF locations.

BAAGN

1200

GP 3.00°
TCH 55

— 3.6 NM

CATEGORY	A	B	C	D
RNP 0.10 DA		432- $\frac{3}{4}$	406 (500- $\frac{3}{4}$)	
RNP 0.30 DA		491-1	465 (500-1)	

AUTHORIZATION REQUIRED

NORFOLK, VIRGINIA

Amdt 1 01FEB18

36°54'N-76°12'W

NORFOLK INTL (ORF)

RNAV (RNP) Y RWY 23

NE-3, 04 SEP 2025 to 02 OCT 2025