


WAAS CH 56503 W17B	APP CRS 176°	Rwy Idg 9802 TDZE 1287 Apt Elev 1296
--	------------------------	---

RNAV (GPS) Y RWY 17L

OKC WILL ROGERS INTL (OKC)

RNP APCH-GPS.		
ASR Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 4500, and LNAV all Cats visibility to RVR 5500. * RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR	MISSED APPROACH: Climb to 5000 direct JAVXE and hold, continue climb-in-hold to 5000.

D-ATIS 125.85	OKC CITY APP CON 124.6 266.8	ROGERS TOWER 119.35 269.45	GND CON 121.9 348.6	CLNC DEL 124.35
-------------------------	--	--------------------------------------	-------------------------------	---------------------------

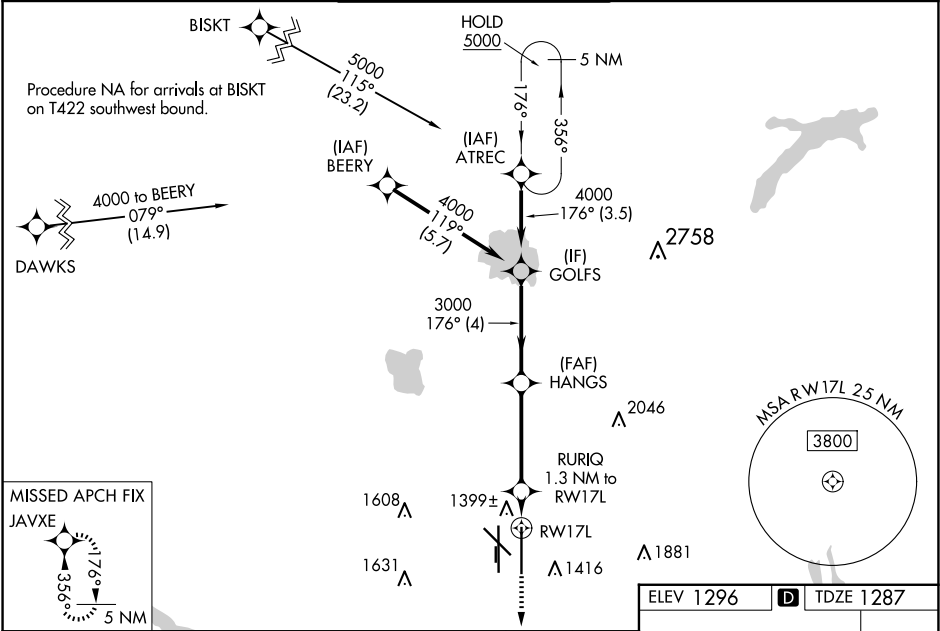

	GOLFS		HANGS		RURIQ 1.3 NM to RW17L		RW17L
	4000		3000		1740		
	176°		176°		176°		
	3000		3000		1740		
	4 NM		3.9 NM		1.3 NM		
CATEGORY	A	B	C	D	E		
LPV DA*	1487/24		200 (200-½)				
LNAV/VNAV DA	1590/24		303 (300-½)				
LNAV MDA	1660/24	373 (400-½)	1660/35		373 (400-¾)		
CIRCLING	1740-1 444 (500-1)	1760-1 464 (500-1)	1960-1¾ 664 (700-1¾)	2000-2¼ 704 (800-2¼)	2240-3 944 (1000-3)		

