
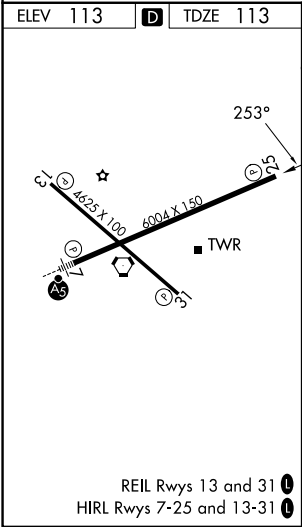


WAAS CH 58125 W25A	APP CRS 253°	Rwy Ldg TDZE 113 Apt Elev 113
--	------------------------	---

RNAV (GPS) RWY 25
ORLANDO EXEC (ORL)

RNP APCH - GPS.					MISSED APPROACH: Climb to 600 then climbing right turn to 1700 direct FTEEN and hold.	
⚠ Circling Rwy 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights.						
ATIS 127.25	ORLANDO APP CON 124.8 351.9	EXECUTIVE TOWER ★ 118.7 (CTAF) 0 239.0	GND CON 121.4 239.0	CLNC DEL 128.45	CLNC DEL 125.225 (When twr closed)	UNICOM 122.95

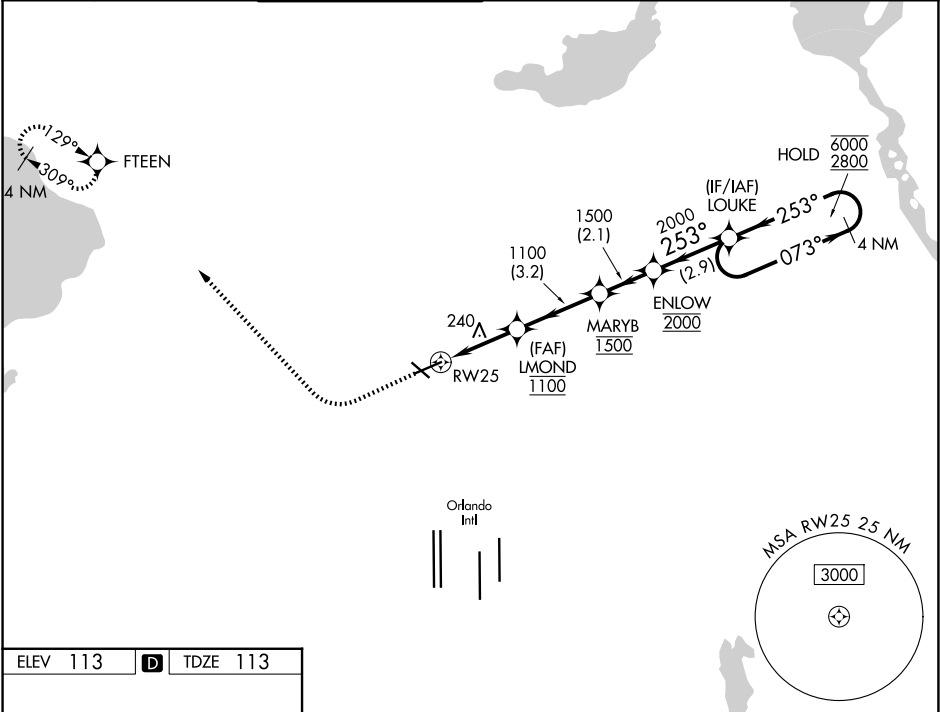

600		1700	FTEEN	4 NM		LOUKE	4 NM	Holding Pattern
		1.2 NM to RW25	LMOND 1100	MARYB 1500	ENLOW 2000	253°	073° → 6000 ← 253° 2800	
								GP 3.00° TCH 46°
		1.2	1.8	3.2 NM	2.1 NM	2.9 NM		
CATEGORY		A		B		C		D
LPV	DA			313-¾ 200 (200-¾)				
LNAV/ VNAV	DA			390-⅞ 277 (300-⅞)				
LNAV	MDA	500-1 387 (400-1)		500-1¼ 387 (400-1¼)				
CIRCLING		580-1 467 (500-1)	680-1 567 (600-1)	860-2¼ 747 (800-2¼)	860-2½ 747 (800-2½)			

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025