


WAAS CH 82211 W25B	APP CRS 258°	Rwy Idg TDZE Apt Elev	7800 1126 1135
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 25L
PHOENIX SKY HARBOR INTL (PHX)

RNP APCH-GPS. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase visibility LPV all Cats to 1 SM, LNAV/VNAV all Cats to 1½ SM and LNAV Cats C/D 1¾ SM.	MALSR 	MISSED APPROACH: Climb to 1900 then climbing left turn to 5000 direct CHOCK and on track 145° to BRAAK and hold.
---	-----------	--

D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)	CLNC DEL 118.1 269.2	CPDLC
--------------------------	--	---	---	--------------------------------	-------

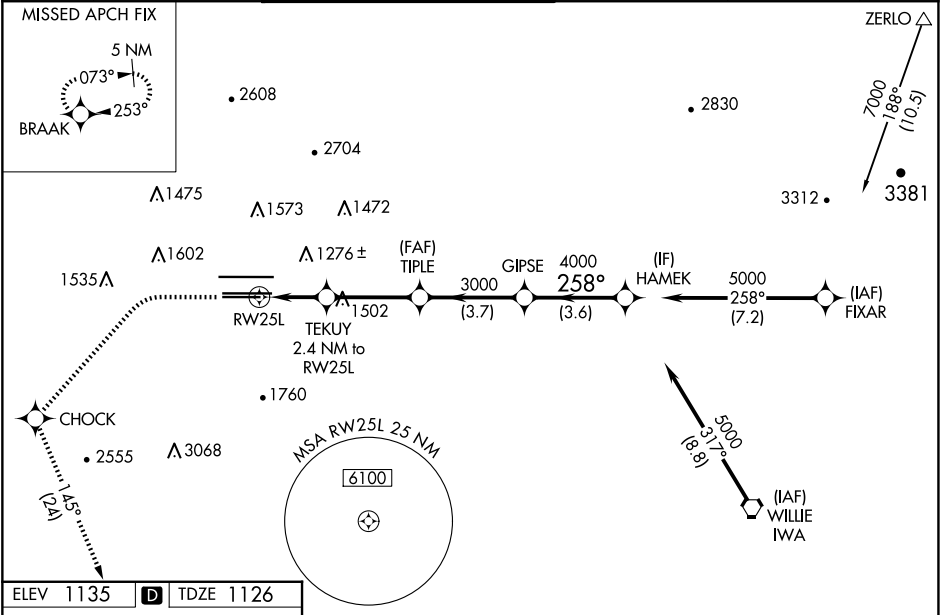

		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).			
		TEKUY 2.4 NM to RW25L	TIPLE 3000	GIPSE 4000	HAMEK 5000
1.7 NM to RW25L		3.3 NM	3.7 NM	3.6 NM	GP 3.00° TCH 49
CATEGORY	A	B	C	D	
LPV DA	1449-½ 323 (400-½)				
LNAV/VNAV DA	1589-1 463 (500-1)				1674-1½ 548 (600-1½)
LNAV MDA	1740-½ 614 (700-½)		1740-1¾ 614 (700-1¾)		
CIRCLING	1740-1 605 (700-1)		2040-2¾ 905 (1000-2¾)		2340-3 1205 (1300-3)

SW-4, 04 SEP 2025 to 02 OCT 2025

SW-4, 04 SEP 2025 to 02 OCT 2025