


WAAS CH 70321 W26A	APP CRS 258°	Rwy Idg 11489 TDZE 1135 Apt Elev 1135
--	------------------------	--


RNAV (GPS) Y RWY 26
PHOENIX SKY HARBOR INTL (PHX)

RNP APCH-GPS. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C.		MISSED APPROACH: Climb to 1700 then climbing right turn to 6000 direct RAXEE and hold.	
--	--	--	--

D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)	CLNC DEL 118.1 269.2	CPDLC
--------------------------	--	---	---	--------------------------------	-------

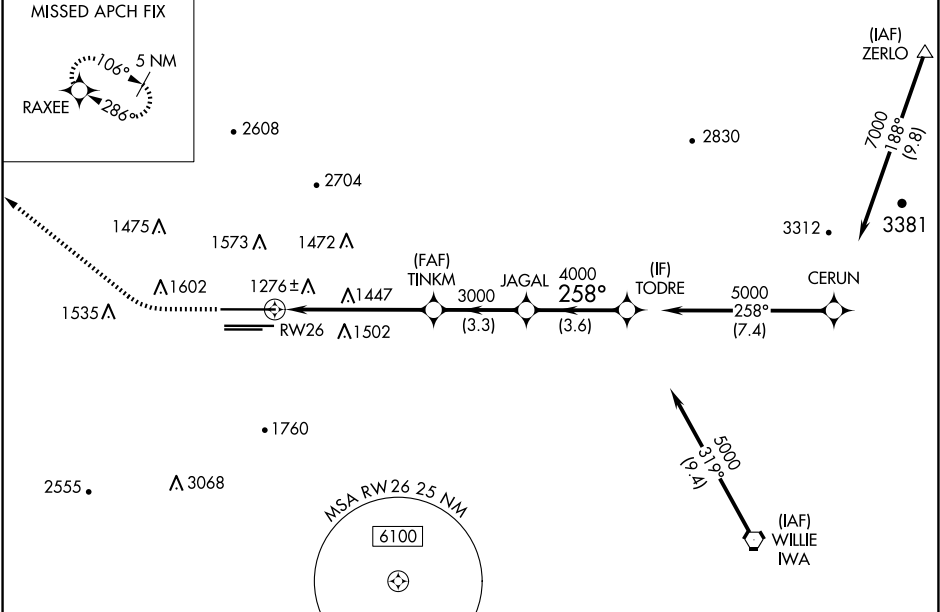

ELEV 1135	D	TDZE 1135
-----------	----------	-----------

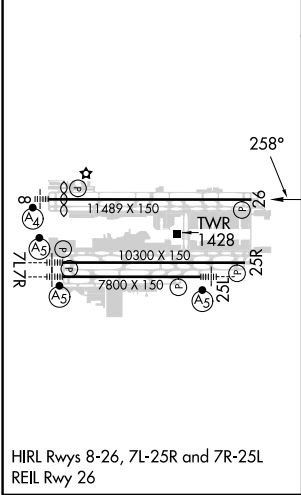

1700	6000	RAXEE	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00°/TCH 71°).	
RW26		TINKM	JAGAL	TODRE
1.6 NM to RW26		3000	4000	5000
1.6		4.1 NM	3.3 NM	3.6 NM
CATEGORY	A	B	C	D
LPV DA	1390-1 ³ / ₄		255 (300- ³ / ₄)	
LNAV/VNAV DA	1581-1 ³ / ₈		446 (500-1 ³ / ₈)	
LNAV MDA	1700-1	565 (600-1)	1700-1 ⁵ / ₈	565 (600-1 ⁵ / ₈)
CIRCLING	1740-1	605 (700-1)	2040-2 ³ / ₄ 905 (1000-2 ³ / ₄)	2340-3 1205 (1300-3)