



WAAS CH 63104 W25A	APP CRS 249°	Rwy Idg TDZE Apt Elev	6880 1725 1744
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25
PIERRE RGNL (PIR)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below -26°C or above 54°C.		MISSED APPROACH: Climb to 4000 direct HOSTR and hold.	
ASOS 119.025	MINNEAPOLIS CENTER 125.1 269.1	CTAF 122.70	UNICOM 122.95

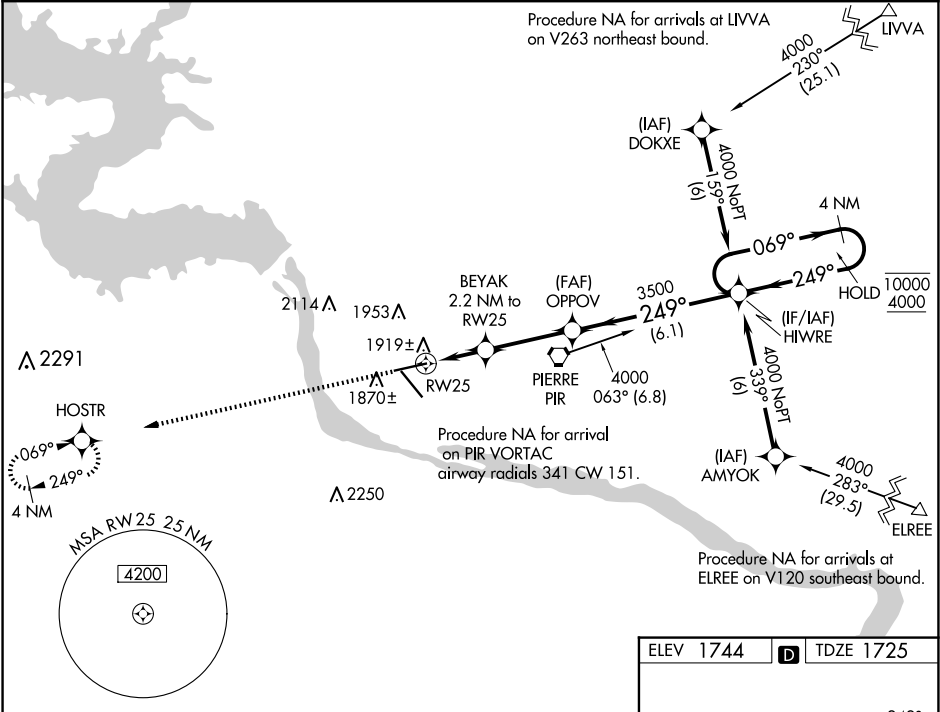

4000	HOSTR	BEYAK 2.2 NM to RW25	OPPOV 3500	HIWRE	4 NM Holding Pattern
*LNAV only		*1.3 NM to RW25			
		2440*	3500	10000 4000	GP 3.00° TCH 54
		1.3 NM	0.9	3.2 NM	6.1 NM
CATEGORY	A	B	C	D	
LPV DA	1975-1 250 (300-1)				
LNAV/VNAV DA	2179-1¾ 454 (500-1¾)				
LNAV MDA	2180-1	455 (500-1)	2180-1¼ 455 (500-1¼)	2180-1½ 455 (500-1½)	
CIRCLING	2240-1 496 (500-1)	2300-1 556 (600-1)	2400-1¾ 656 (700-1¾)	2460-2¼ 716 (800-2¼)	

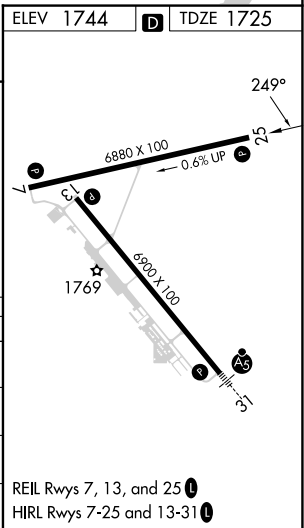

NC-1, 04 SEP 2025 to 02 OCT 2025

NC-1, 04 SEP 2025 to 02 OCT 2025