

LOC/DME I-SZK

111.1

Chan 48

APP CRS

072°

Rwy Idg

6800

TDZE

1175

Apt Elev

1175

LDA Z RWY 6


ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)

ADF required. RADAR required for procedure entry.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 direct VIT NDB and hold, continue climb-in-hold to 5000. Missed approach requires minimum climb of 350 feet per NM to 3600.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

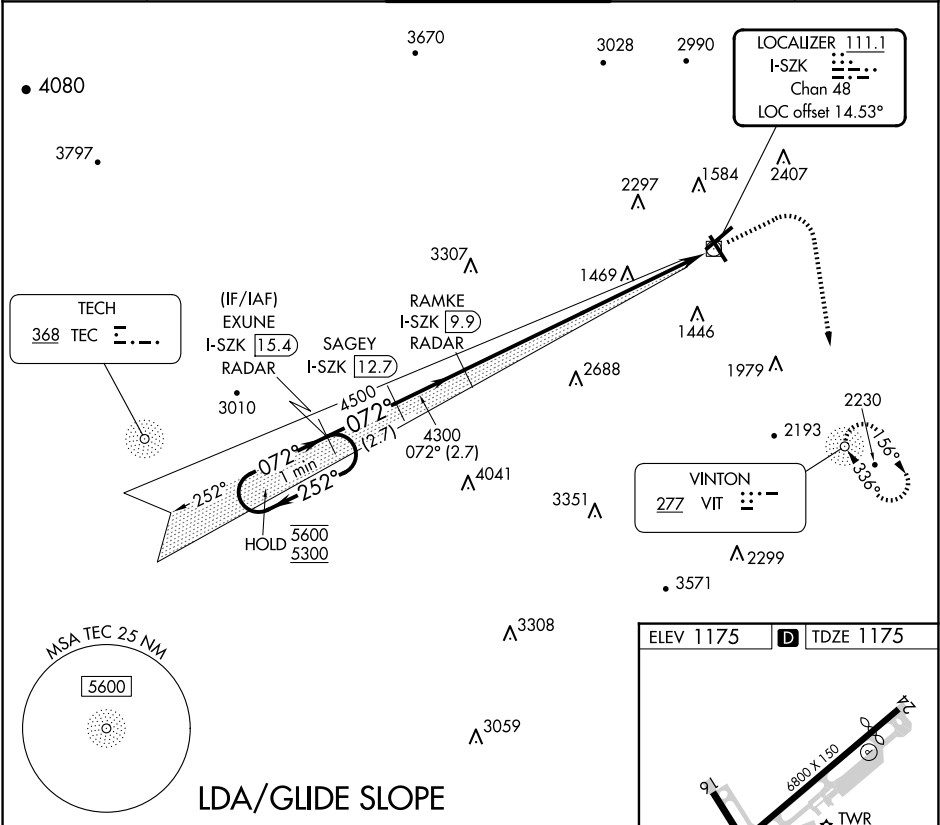

MSA TEC 25 NM

5600

LDA/GLIDE SLOPE

One Minute Holding Pattern

EXUNE I-SZK 15.4

SAGEY I-SZK 12.7

RAMKE I-SZK 9.9

RADAR

VGSI and LDA glidepath not coincident (VGSI Angle 3.00/TCH 58).

1800

5000

VIT

GS 3.00° TCH 55

5600

5300

252°

072°

072°

4500

4300

2.7 NM

2.7 NM

9.7 NM

CATEGORY	A	B	C	D
S-LDA/GS 6		1475-1/2	300 (300-1/2)	

REIL Rwy 6 and 24

HIRL Rwy 6-24 and 16-34

TWR 1365

6800 X 180

3810 X 150

0-25 UP

072°