

WAAS CH 70402 W35A	APP CRS 350°	Rwy Ldg 10008 TDZE 3671 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 35
ROSWELL AIR CENTER (ROW)

ROSWELL AIR CENTER (ROW)


RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 4001 feet and all visibilities $\frac{1}{4}$ SM; increase LNAV/VNAV DA to 4033 feet; increase all MDAs 80 feet and visibility LNAV Cat C $\frac{1}{4}$ SM, and Circling Cat D $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.


MISSED APPROACH: Climb to 6000
direct HOG/G and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5(CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
----------------------	----------------------------------	--	------------------------	----------------------------	------------------


MISSED APCH FIX




Procedure NA for arrivals at CME VORTAC
via V291 northwest bound.

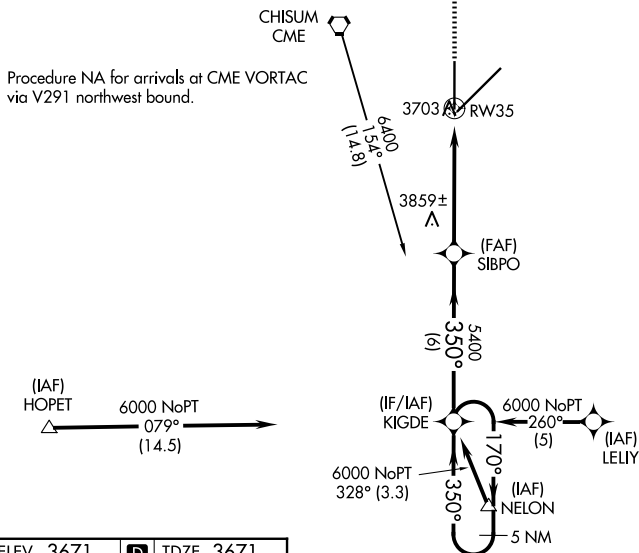


6000
227°
(8.3)



ELEV 3671	D	TDZE 3671
-----------	----------	-----------

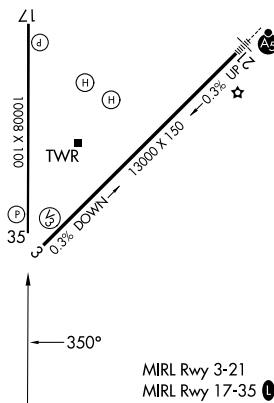

MIRL Rwy 3-21
MIRL Rwy 17-35 **L**

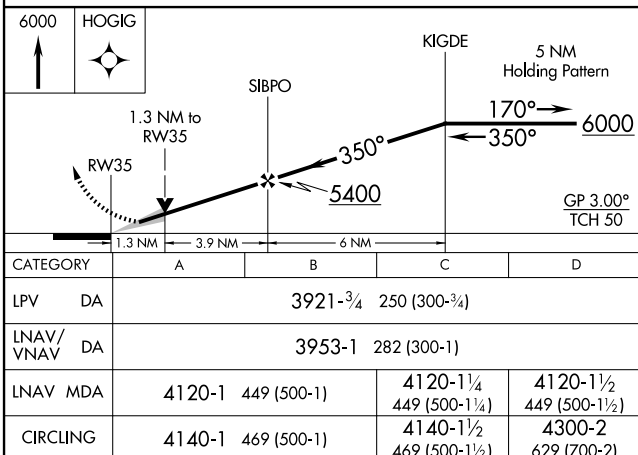

ROSWELL, NEW MEXICO

Orig-B 06OCT22

33°18'N-104°32'W

ROSWELL AIR CENTER (ROW)
RNAV (GPS) RWY 35

SW-1, 04 SEP 2025 to 02 OCT 2025