


LOC/DME I-JAK 110.3 Chan 40	APP CRS 064°	Rwy Ldg TDZE Apt Elev 7323 551 617
---	------------------------	--

LOC RWY 6
ST LOUIS LAMBERT INTL (STL)

DME or RADAR required.			MALSR	MISSED APPROACH: Climb to 2200 then climbing left turn to 3000 direct STL VORTAC and hold, continue climb-in-hold to 3000.		
▼ Rwy 6 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-LOC-6 Cat A and B visibility to RVR 5500, and Cat C, D, and E to 1½ SM.						
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (11/29)	CLNC DEL 119.5 363.1	CPDLC	

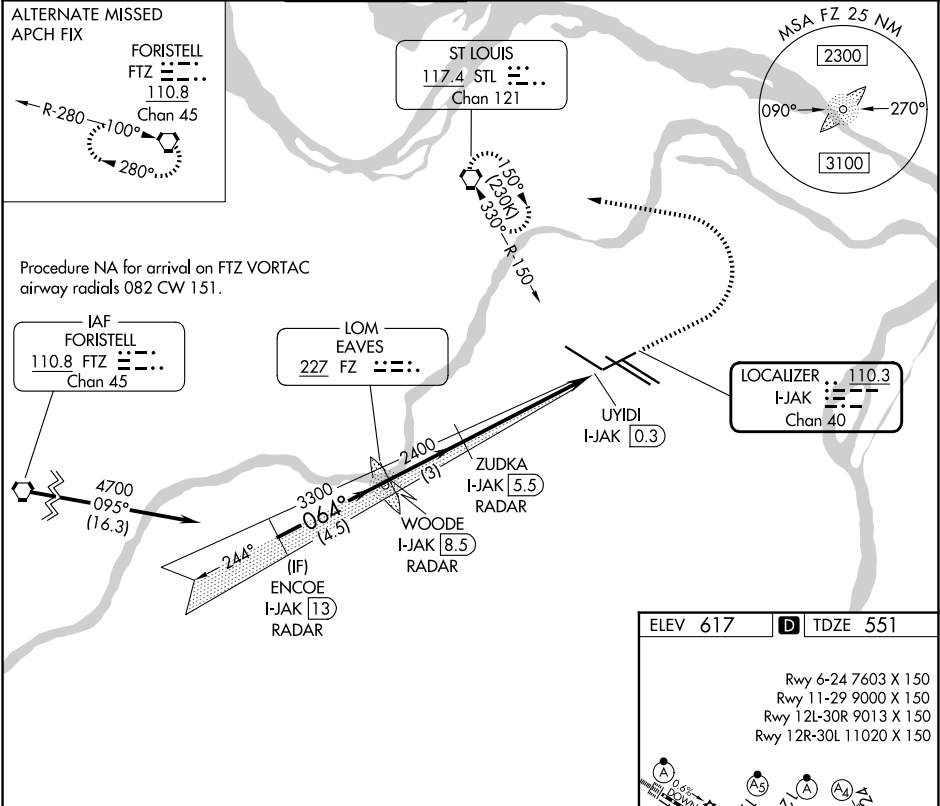

LOC unusable 0.2 DME inbound.					
ENCOE I-JAK 13 RADAR		WOODE I-JAK 8.5 RADAR	ZUDKA I-JAK 5.5 RADAR	I-JAK 1.2 DME ANTENNA	STL
4700		3300	2400	2200	3000
064°		064°	064°	064°	064°
4.5 NM		3 NM	4.3 NM	0.9 NM	0.4
CATEGORY	A	B	C	D	E
S-6	1020/40 469 (500-¾)		1020/50 469 (500-1)		

