


LOC/DME I-MOY 109.5 Chan 32	APP CRS 164°	Rwy Ldg 12002 TDZE 4231 Apt Elev 4231
---	------------------------	--


ILS or LOC RWY 16L
SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. From EKKHO. DME or RADAR required.	ALSf-2 	MISSED APPROACH: Climb to 4800 then climb to 10000 on FFU VORTAC R-341 to FFU VORTAC and hold.
Simultaneous approach authorized. For inop ALS, increase S-LOC 16L Cat C/D visibility to 1 3/8 SM.		

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 119.05 257.8	GND CON 123.775 348.6	CLNC DEL 127.3 379.975	CPDLC
---------------------------------	--	---	---------------------------------	----------------------------------	-------

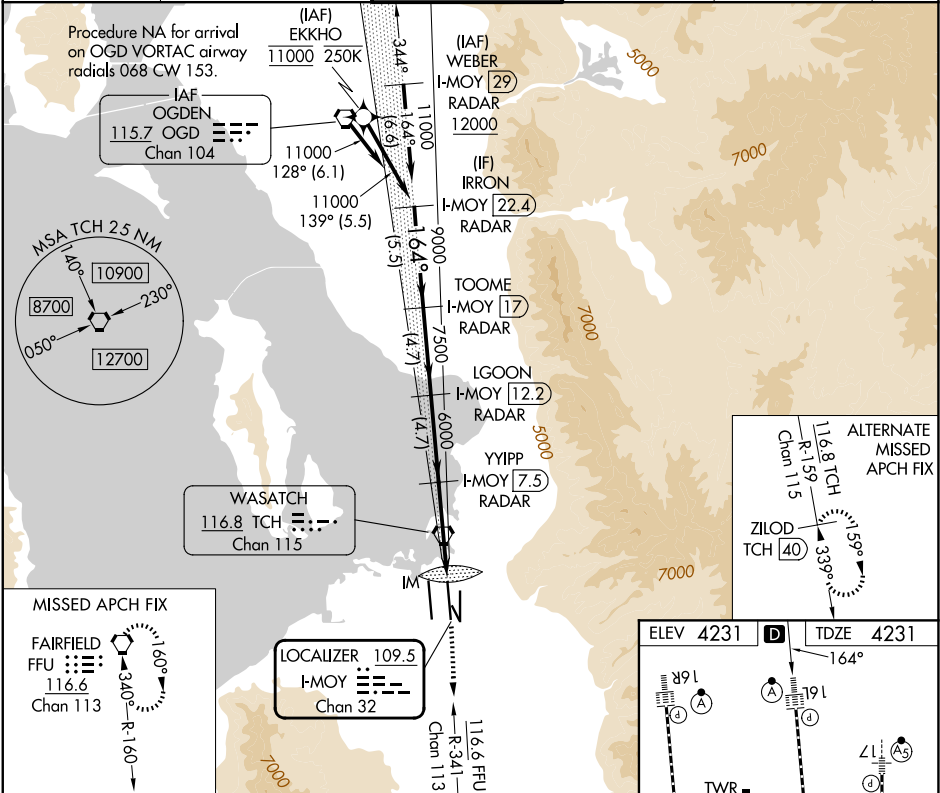

IRRON I-MOY 22.4 RADAR		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).		4800	10000	FFU
TOOME I-MOY 17 RADAR		LGOON I-MOY 12.2 RADAR		YYIPP I-MOY 7.5 RADAR	FFU R-341	
GS 3.00° TCH 55		11000		9000	7500	6000
5.5 NM		4.7 NM		4.7 NM		4.1 NM
CATEGORY		A		B		C
S-ILS 16L		4431/18		200 (200-1/2)		
S-LOC 16L		4720/24		489 (500-1/2)		4720/50 489 (500-1)

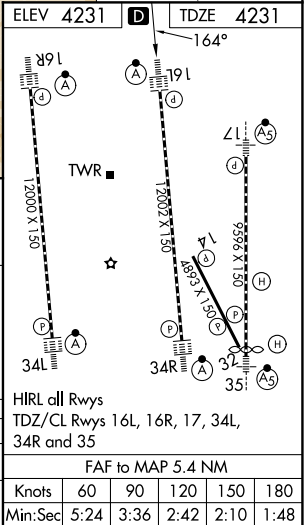

SW-4, 04 SEP 2025 to 02 OCT 2025

SW-4, 04 SEP 2025 to 02 OCT 2025