
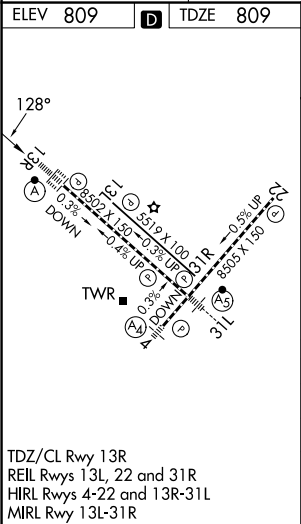


APP CRS	Rwy Ldg	8502
128°	TDZE	809
	Apt Elev	809

RNAV (RNP) Z RWY 13R

SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS.			ALSIF-2	MISSED APPROACH: (Do not exceed 210K until POYIG) Climb to 3100 on track 128° to POYIG and track 171° to EMBOW and hold.	
For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.3 all Cats visibility to RVR 6000.					
D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL	CPDLC
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7	

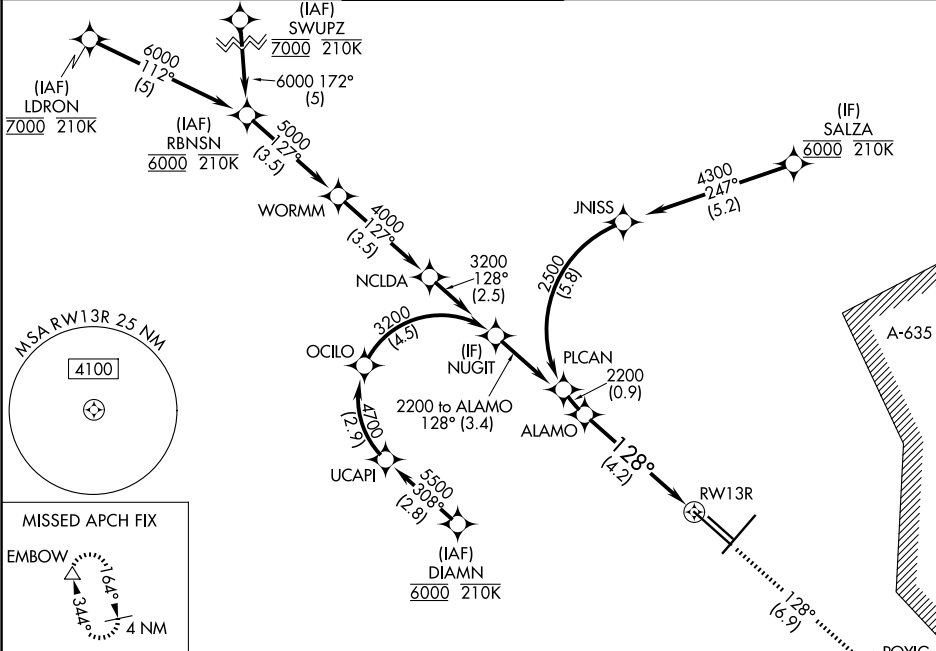

ELEV 809		TDZE 809
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		
ALAMO 2200		
GP 3.00° TCH 58		
2200		
128°		
RWY 13R		
4.2 NM		
CATEGORY	A	B
RNP 0.15 DA	1137/26	328 (400-½)
RNP 0.30 DA	1218/40	409 (500-¾)
AUTHORIZATION REQUIRED		

SC-3, 04 SEP 2025 to 02 OCT 2025

SC-3, 04 SEP 2025 to 02 OCT 2025