

LOC/DME I-SAN <u>111.55</u> Chan 52 (Y)	APP CRS 095°	Rwy Ldg 7280 TDZE 17 Apt Elev 17
---	------------------------	---

ILS Y or LOC Y RWY 9
SAN DIEGO INTL (SAN)

▼ Circling NA north of Rwy 9-27. Autopilot coupled approach NA below 530. When Circling to Rwy 27 at night, operational VGSi required, remain on or above VGSi glidepath until threshold.

▲ For Inop ALS, increase S-ILS 9 all Csts visibility to 2 ½ SM. Rwy 9 helicopter visibility reduction below RVR 4000 NA.


Inop table does not apply to S-ILS 9.

MALSR



MISSED APPROACH: Climb to 5000 on heading 095° and on PGY VORTAC R-300 to PGY VORTAC, then right turn on PGY VORTAC R-268 to CAPUS INT/23.4 DME and hold.
#Missed approach requires minimum climb of 270 feet per NM to 4000.

D-ATIS 134.8	SOCAL APP CON 119.6 363.1 (WEST) 124.35 279.625 (EAST)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9	CLNC DEL 125.9	CPDLC
------------------------	--	---	-------------------------	--------------------------	-------

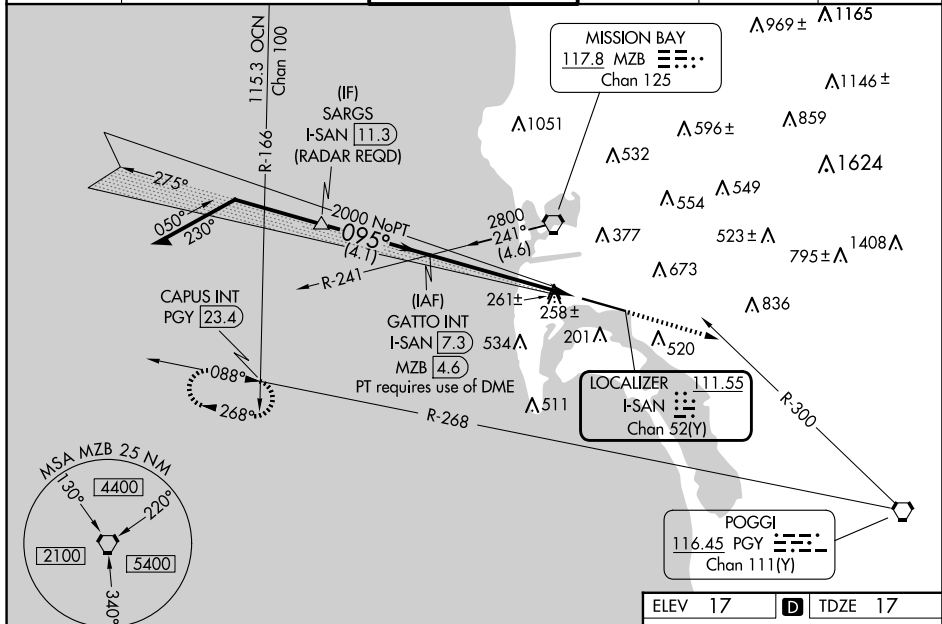

VGSI and ILS glidepath not coincident
(VGSI Angle 3.30/TCH 76).

Remain
within 10 NM

GATTO INT
L-SAN 7.3

5000	
------	--

PGY

PG

1

CPI

GS 3.10
TCH 55

2000

* I-SAN

4

I

* LOC only.

-SAM

1.4

095°

o

CATEGORY	A	B	C	D
S-ILS 9#	258/40 241 (300-¾)			
S-ILS 9	751-2 734 (800-2)			
S-LOC 9	960/40 943 (1000-¾)		960-2 943 (1000-2)	
CIRCLING	960-1¼ 943 (1000-1¼)		960-2¾	960-3
			943 (1000-2¾)	943 (1000-3)

TDZ/CL Rwys 9 and 27
HIRL Rwy 9-27

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

SAN DIEGO, CALIFORNIA

Amdt 2B 15AUG19

32°44'N-117°11'W

SAN DIEGO INTL (SAN)

ILS Y or LOC Y RWY 9

SW-3, 04 SEP 2025 to 02 OCT 2025