

WAAS
CH **53533**
W19B

APP CRS
194°

Rwy Ldg
TDZE **11**
Apt Elev **13**

RNAV (GPS) Y RWY 19R
SAN FRANCISCO INTL (SFO)

RNP APCH-GPS.



▼

⚠

LNNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glidepath. Simultaneous approach NA below 12°C (52°F).

MISSED APPROACH: Climb to 1540 then climbing right turn to 3000 direct THHEO and hold.

D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8	CLNC DEL 118.2	CPDLC
-------------------------------------	--------------------------------------	---	-------------------------	--------------------------	-------

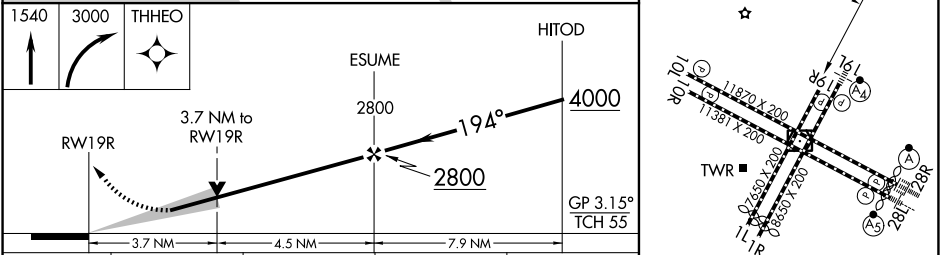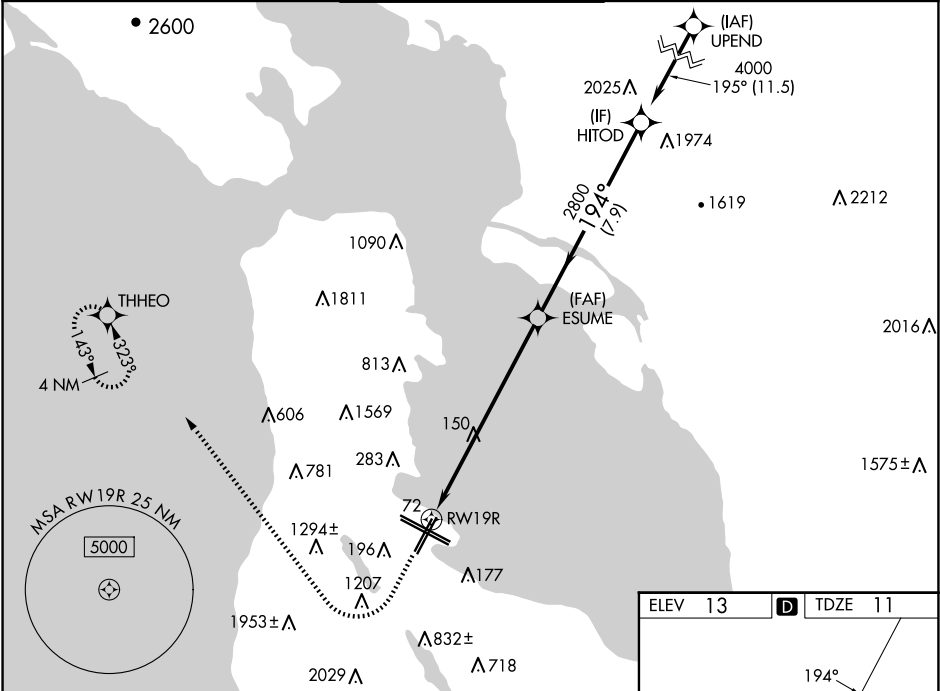

CATEGORY	A	B	C	D
LPV DA	1005-4 994 (1000-4)			
LNNAV/VNAV DA	878-2 1/2 867 (900-2 1/2)			
LNNAV MDA	1320-1 1/4 1309 (1400-1 1/4)	1320-1 1/2 1309 (1400-1 1/2)	1320-3	1309 (1400-3)

TDZ/CL Rwy 19L and 28R

REIL Rwy 1L, 1R and 10L

HIRL all Rwy