

WAAS CH 48803 W28A	APP CRS 284°	Rwy Ldg 11236 TDZE 13 Apt Elev 13
--	------------------------	--

RNAV (GPS) Z RWY 28R

SAN FRANCISCO INTL (SFO)

RNP APCH - GPS.

▼

▲

Circling N/A to Rwy's 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 ¼ SM, increase LNAV Cat C/D visibility to 2 SM.

ALS-F-2

ⓘ


ⓘ

ⓘ


MISSED APPROACH: Climb to 3000 direct VIKYU and hold.

*Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see RNAV (GPS) RWY 28L.

D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8	CLNC DEL 118.2	CPDLC
---	--------------------------------------	---	-------------------------	--------------------------	-------

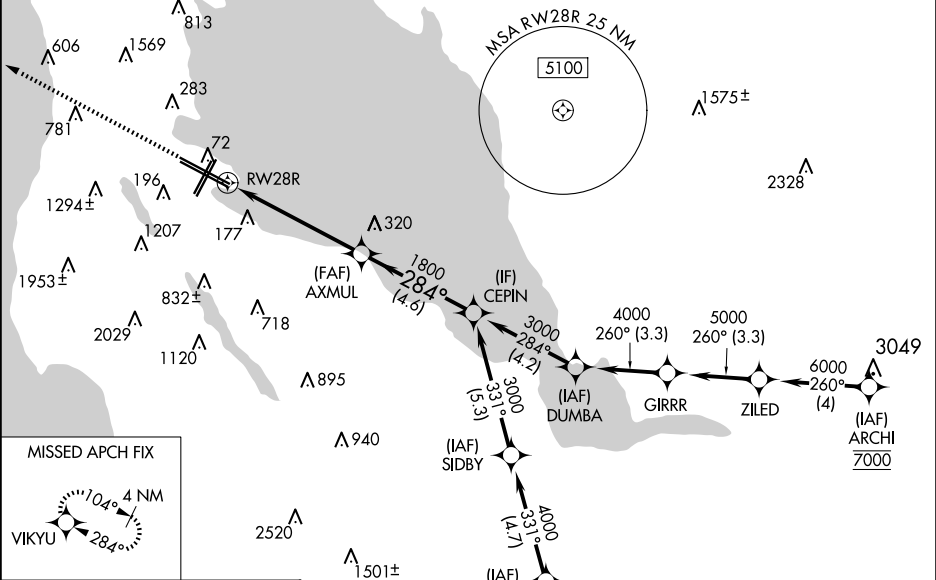

ELEV 13	D	TDZE 13
---------	----------	---------

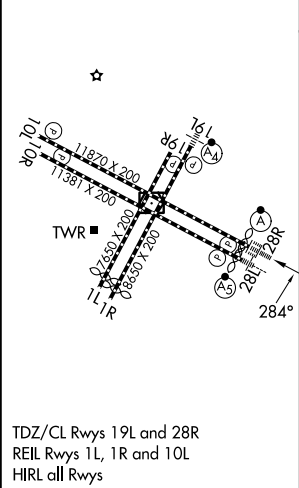

3000	VIKYU	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 68).		CEPIN
RWY 28R		AXMUL	1800	3000
2.1 NM to RWY 28R		2.1 NM	3.3 NM	4.6 NM
GP 3.00° TCH 55				
CATEGORY	A	B	C	D
LPV DA*	213/18 200 (200-½)			
LNAV/VNAV DA	642-1 ⅓ 629 (700-1 ⅓)			
LNAV MDA	760/24 747 (800-½)	760/40 747 (800-¾)	760-1 ⅓ 747 (800-1 ⅓)	
CIRCLING	760-1 747 (800-1)	1020-1 ½ 1007 (1100-1 ½)	1640-3 1627 (1700-3)	NA