



WAAS CH 99502 W20A	APP CRS 196°	Rwy Idg 5700 TDZE 54 Apt Elev 56
--	------------------------	---

RNAV (GPS) Y RWY 20R

JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS. RADAR required.		MALSR 	MISSED APPROACH: Climb to 3000 direct MINOE.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Circling Rwy 20L NA at night. For inop ALS increase LNAV/VNAV visibility to 1 1/2 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.			

D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 343.625	GND CON 120.8	CLNC DEL 118.0	CPDLC	UNICOM 122.95
------------------------	-------------------------------------	--	-------------------------	--------------------------	-------	-------------------------

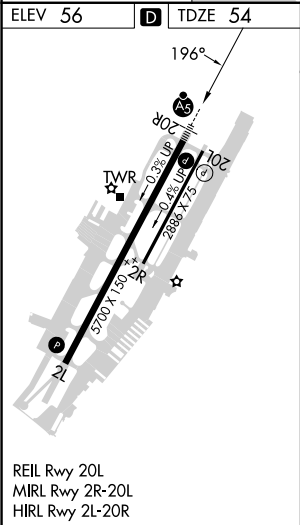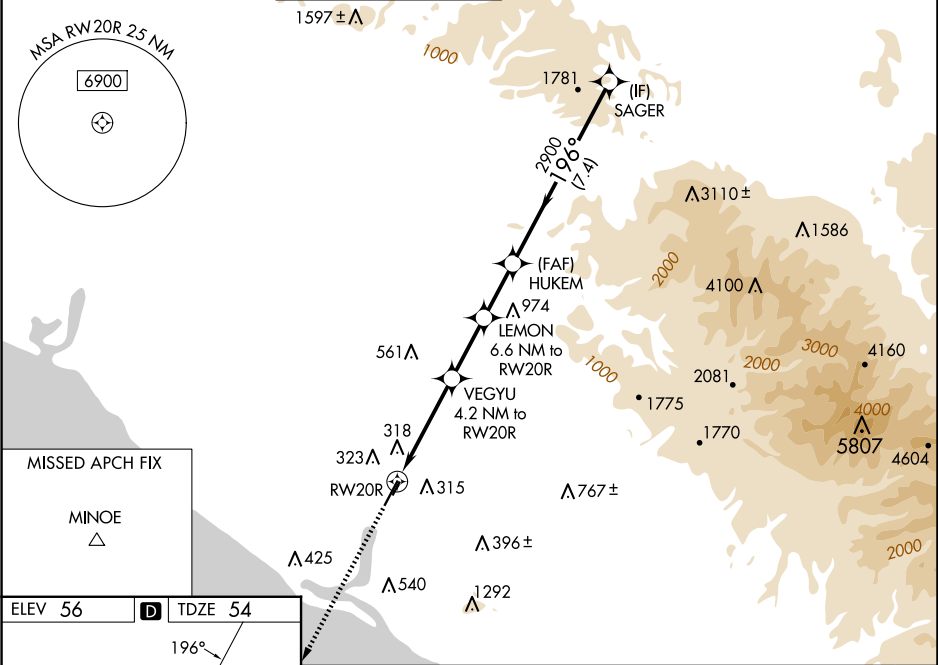

ELEV 56		D	TDZE 54
3000 MINOE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).	
1.5 NM to RW20R		2.7 NM	2.5 NM
1.5 NM		2.7 NM	2.5 NM
CATEGORY		A	B
LPV DA*		255/24	201 (200-1/2)
LNAV/VNAV DA		516/50	462 (500-1)
LNAV MDA		580/24 526 (600-1/2)	580/55 526 (600-1)
CIRCLING		640-1 584 (600-1)	840-2 1/4 784 (800-2 1/4) 1180-3 1124 (1200-3)