
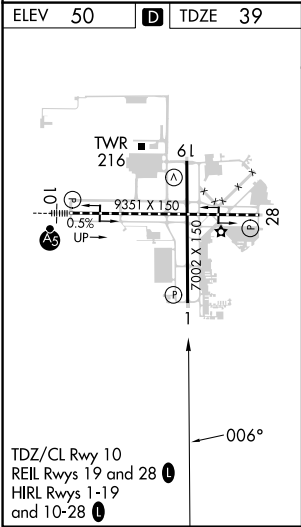


WAAS CH 45515 W01A	APP CRS 006°	Rwy Ldg 7002 TDZE 39 Apt Elev 50
--	------------------------	---

RNAV (GPS) RWY 1

SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH.			MISSED APPROACH: Climb to 2500 direct SUTME and hold.		
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).					
ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95

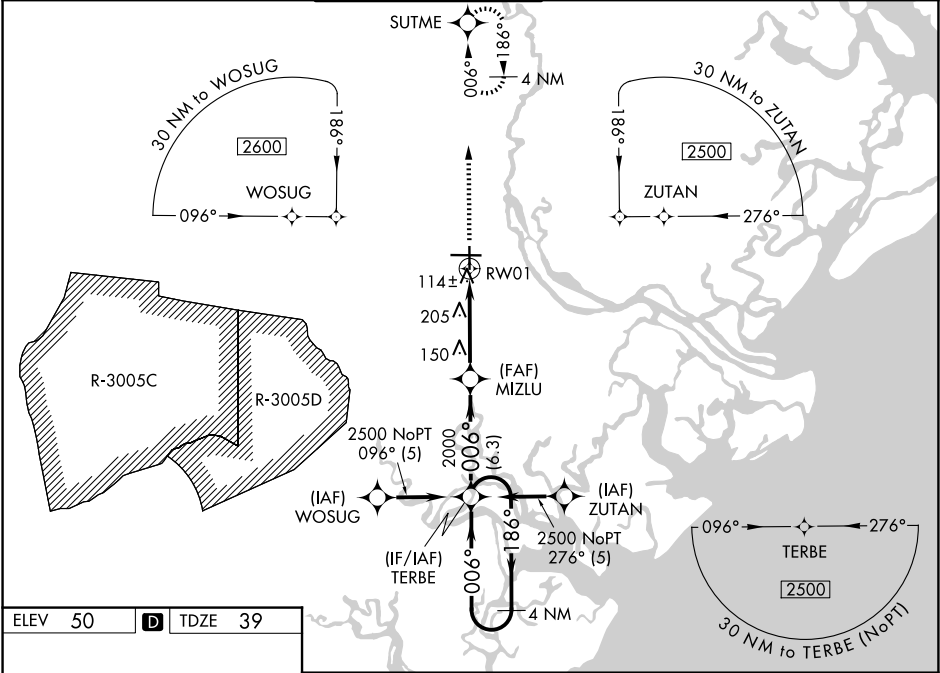

2500

↑

SUTME

✦

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 74).

*LNNAV only.

1.3 NM to RW01

RW01

1.3 NM

4.6 NM

6.3 NM

MIZLU

2000

2000

TERBE

4 NM Holding Pattern

186°

006°

2500

GP 3.00°

TCH 57

CATEGORY	A	B	C	D
LPV DA	239/40 200 (200-¾)			
LNNAV/VNAV DA	384/60 345 (400-1¼)			
LNNAV MDA	520/55	481 (500-1)	520-1⅓	481 (500-1⅓)
CIRCLING	520-1	470 (500-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)

SE-4, 04 SEP 2025 to 02 OCT 2025

SE-4, 04 SEP 2025 to 02 OCT 2025