

WAAS CH 97622 W28A	APP CRS 282°	Rwy Idg 4850 TDZE 323 Apt Elev 378
--	------------------------	---

RNAV (GPS) RWY 28

SCHENECTADY COUNTY (SCH)

⚠


NA

Circling Rwy 10 NA at night. Baro-VNAV NA when using Albany altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Albany altimeter setting and increase all DA 33 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility and LNAV Cat C/D visibility ½ mile.

MISSED APPROACH:

Climb to 3000 direct UNMIP and hold.

AWOS-3 119.275	ALBANY APP CON 132.825 263.075	SCHENECTADY TOWER ★ 121.3 (CTAF) 0 321.1	GND CON 121.9	UNICOM 122.95
--------------------------	--	---	-------------------------	-------------------------

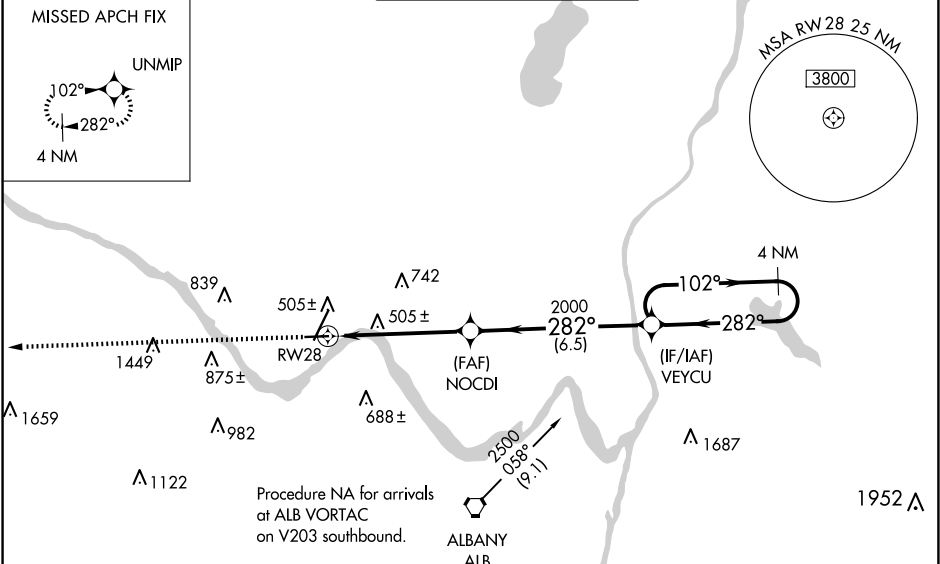

ELEV 378

TDZE 323

3000

UNMIP

NOCDI

VEYCU

4 NM Holding Pattern

2000

282°

102°

282°

2500

GP 3.00°

TCH 52

RW28

5.1 NM

6.5 NM

CATEGORY	A	B	C	D
LPV DA	618-1		295 (300-1)	
LNAV/VNAV DA	774-1½		451 (400-1½)	
LNAV MDA	820-1	497 (500-1)	820-1¾	497 (500-1¾)
CIRCLING	880-1 502 (600-1)	940-1 562 (600-1)	1120-2¼ 742 (800-2¼)	1320-3 942 (1000-3)

REIL Rwy 28

HIRL Rwy 4-22

MIRL Rwy 10-28

TWR 389

0.9% Up

4850 X 150

700 X 150

282°