

WAAS
CH **66024**
W14A

APP CRS
140°

Rwy Ldg
TDZE **60**
Apt Elev **62**

RNAV (GPS) RWY 14

SEBRING RGNL (SEF)

RNP APCH-GPS.
RADAR required for procedure entry.


▼

▲

Rwy 14 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Vero Beach Muni altimeter setting and increase all MDAs 140 feet; increase LP visibility Cat C and D $\frac{3}{4}$ SM, LNAV visibility Cat C and D $\frac{1}{2}$ SM; increase Circling visibility Cat C $\frac{1}{2}$ SM and Cat D $\frac{1}{4}$ SM. Straight-in Rwy 14 NA at night, Circling Rwy 14 NA at night.

MISSED APPROACH:
Climb to 2000 direct
YOHOR and hold.

AWOS-3 119.475	MIAMI CENTER 134.55 257.7	UNICOM 122.7 (CTAF) 0
--------------------------	-------------------------------------	---------------------------------

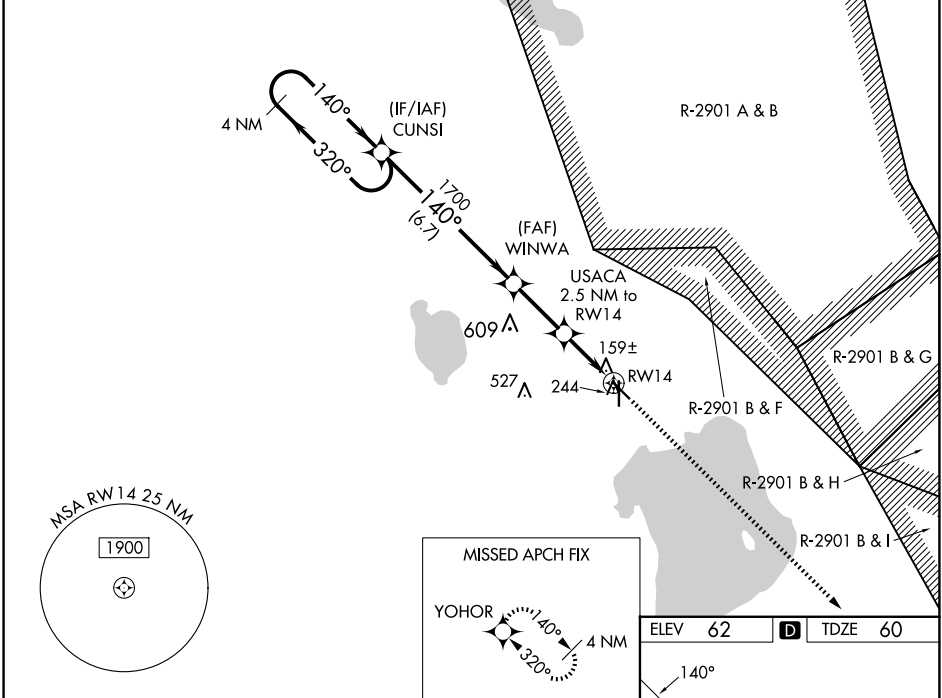

4 NM Holding Pattern

CUNSI

2000

320°

140°

140°

WINWA

USACA 2.5 NM to RWY 14

3.00° TCH 40

1700

880

6.7 NM

2.5 NM

2.5 NM

2000 YOHOR

61

6990 X 100

5234 X 100

32

1

MIRL Rwy 1-19 0

REIL Rwy 1 and 19 0

CATEGORY	A	B	C	D
LP MDA	420-1 360 (400-1)			
LNAV MDA	560-1	500 (500-1)	560-1 $\frac{3}{8}$	500 (500-1 $\frac{3}{8}$)
CIRCLING	600-1	538 (600-1)	600-1 $\frac{1}{2}$ 538 (600-1 $\frac{1}{2}$)	880-2 $\frac{3}{4}$ 818 (900-2 $\frac{3}{4}$)

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025