



WAAS CH 86528 W18A	APP CRS 179°	Rwy Idg 9000 TDZE 741 Apt Elev 749
--	------------------------	---


RNAV (GPS) RWY 18L

NORTH TEXAS RGNL/PERRIN FLD (GYI)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 3000 direct SERYO and hold.
Circling Rwy 18R, 36L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM.			

ATIS 118.775	FORT WORTH CENTER 124.75 323.0	NORTH TEXAS TOWER ★ 120.575 (CTAF) 233.7	GND CON 124.125
------------------------	--	--	---------------------------

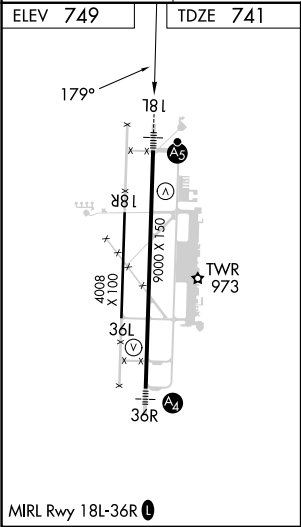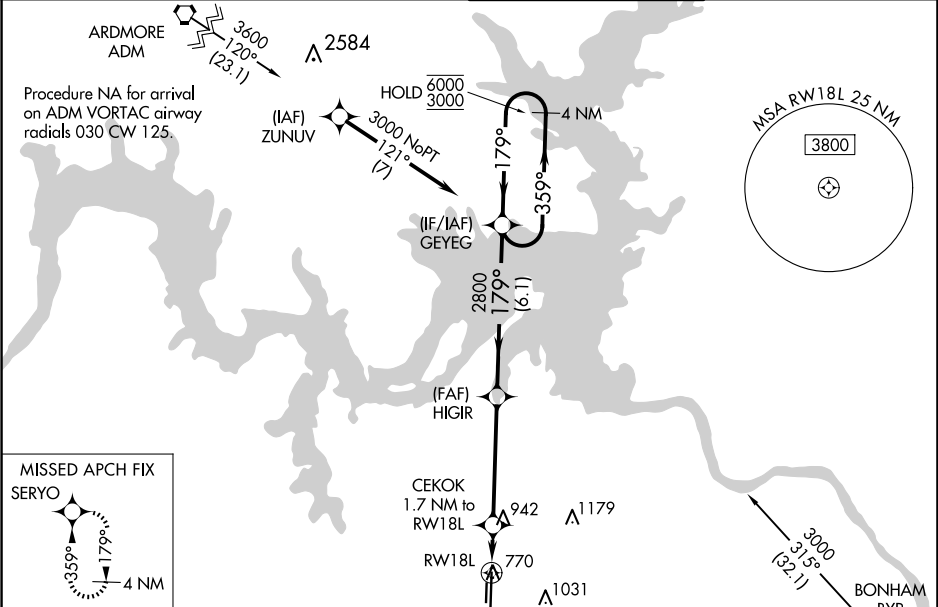

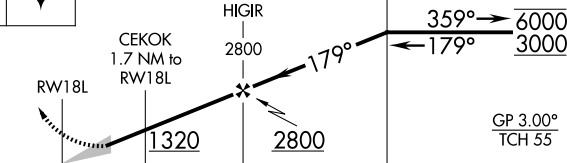870 ↓		Λ¹²⁴⁹ on BYP VORTAC airway radials 264 CW 305.		BYP ↓	
3000 ↑	SERYO 	VGSI and RNAV glidepath not coincident (VGSI angle 3.00/TCH 48).		4 NM Holding Pattern	
					
CATEGORY	A		B	C	D
LPV DA	941-½		200 (200-½)		
LNAV/ VNAV DA	1015-½		274 (300-½)		
LNAV MDA	1200-½	459 (500-½)	1200-⅞		459 (500-⅞)
 CIRCLING	1300-1	551 (600-1)	1400-1¾ 651 (700-1¾)	1540-2½ 791 (800-2½)	