


LOC FSD 109.9	APP CRS 030°	Rwy Ldg TDZE Apt Elev	8999 1424 1430
-------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 3

JOE FOSS FLD (FSD)

ADF or RADAR required.		MALSR	MISSED APPROACH: Climb to 3400 then left turn direct FSD VORTAC and hold.
For inop ALS, increase S-LOC 3 Cats C/D visibility to 1½ SM, and S-LOC 3 MAREY fix minimums Cats C/D to 1½ SM. -30°C			

ATIS 126.6	SIOUX FALLS APP CON* 125.8 284.725	SIOUX FALLS TOWER* 118.3 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--	---	-------------------------------	-------------------------

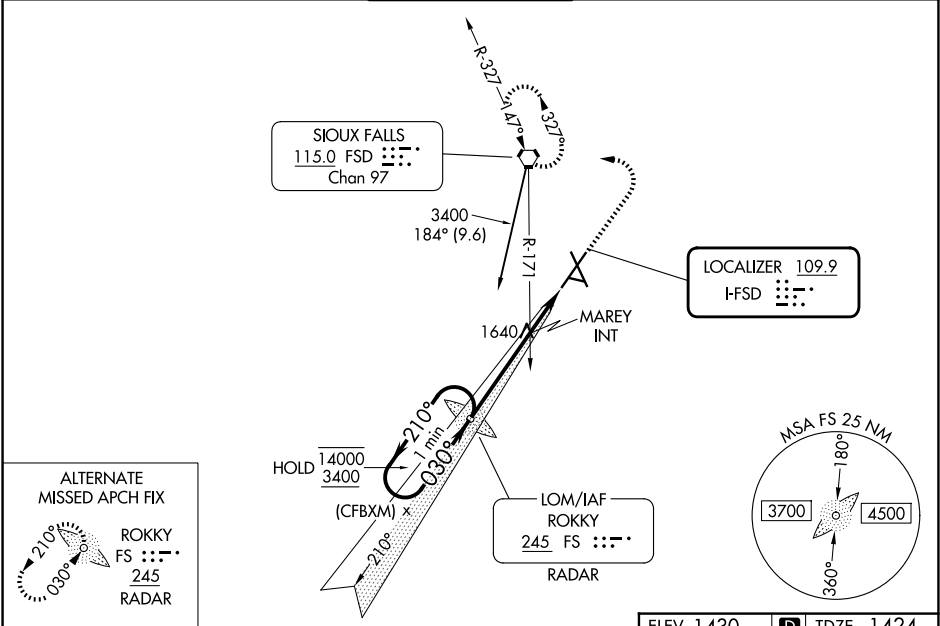

One Minute Holding Pattern		FS LOM ROKKY RADAR	3400	FSD
14000 3400 210° 030° 3400 2100 3305 3700 3.7 NM 2 NM		MAREY INT		
CATEGORY	A	B	C	D
S-ILS 3	1674/24 250 (300-½)			
S-LOC 3	2100/24	676 (700-½)	2100-1½	676 (700-1½)
CIRCLING	2100-1	670 (700-1)	2100-1¾ 670 (700-1¾)	2200-2½ 770 (800-2½)
MAREY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 3	1940/24	516 (600-½)	1940/55	516 (600-1)
CIRCLING	1980-1	550 (600-1)	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)

