

WAAS CH 50108 W27A	APP CRS 274°	Rwy Ldg 8412 TDZE 774 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 27L
SOUTH BEND INTL (SBN)


RNP APCH - GPS.	
-----------------	--

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C
A or above 54°C. Circling to Rwy 27R NA at night. For inop ALS, increase
LNAV Cat C/D visibility to 1½ SM.


MALSR

MISSED APPROACH: Climb to 2600 direct TOKOC and hold.


ATIS 120.675	SOUTH BEND APP CON ★ 118.55 257.8	SOUTH BEND TOWER ★ 135.675 (CTAF) 0 257.8	GND CON 121.7	CLNC DEL 121.9
------------------------	---	---	-------------------------	--------------------------

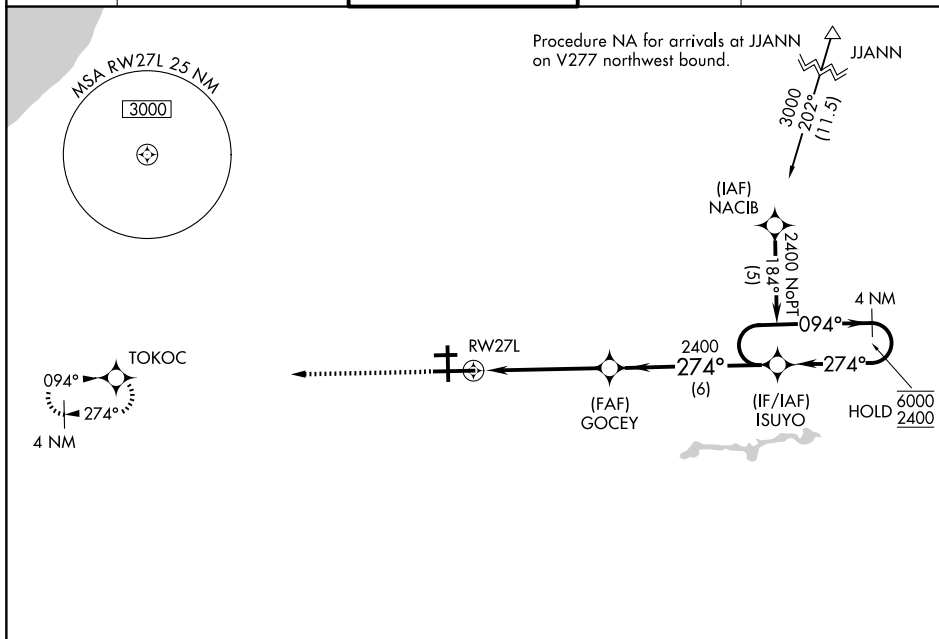

ELEV 798		TDZE 774
----------	---	----------



HIRL Rwy 9R-27L **L**
MIRL Rwy 18-36 **L**
MIRL Rwy 9L-27R

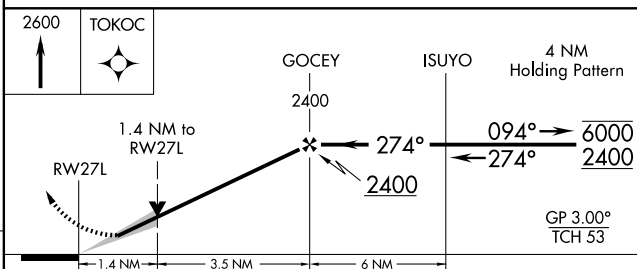

CATEGORY	A	B	C	D
LPV DA		1030/24	256 (300-½)	
RNAV/ VNAV DA		1160/40	386 (400-¾)	
RNAV MDA	1260/24	486 (500-½)	1260/50	486 (500-1)
CIRCLING	1280-1	482 (500-1)	1440-1¾ 642 (700-1¾)	1520-2¾ 722 (800-2¾)