



LOC/DME I-OLJ	APP CRS	Rwy Ldg	11002
111.1	031°	TDZE	2385
Chan 48		Apt Elev	2385

ILS or LOC RWY 3

SPOKANE INTL (GEG)

DME required for localizer only.	ALSF-2	MISSED APPROACH: Climb to 2900 then climbing left turn to 4200 direct GEG VORTAC and hold, continue climb-in-hold to 4200.
For inop ALS, increase S-LOC 3 Cat C/D visibility to RVR 5500.		

ATIS	SPOKANE APP CON	SPOKANE TOWER	GND CON	CLNC DEL
124.325 254.375	123.75 282.25 (205°-025°) 133.35 263.0 (026°-204°)	118.3 278.3	121.9 348.6	127.55

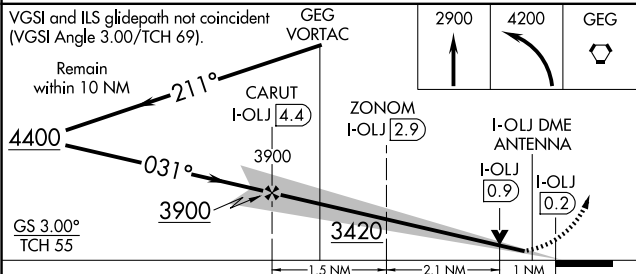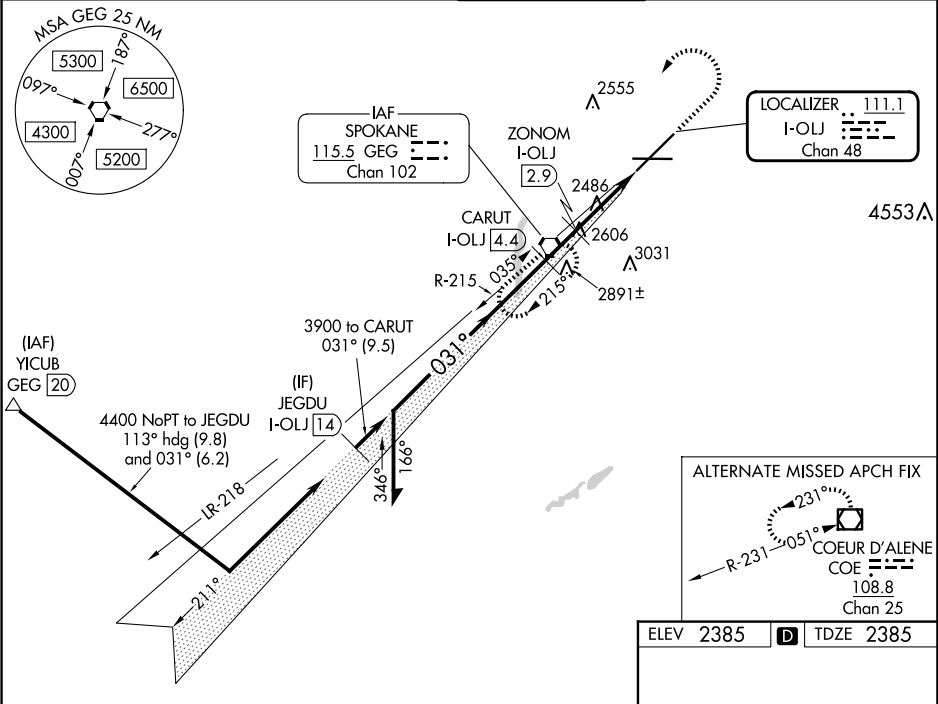

CATEGORY	A	B	C	D
S-ILS 3	2585/18 200 (200-½)			
S-LOC 3	2780/24	395 (400-½)	2780/35	395 (400-¾)
CIRCLING	2960-1 575 (600-1)	2980-1 595 (600-1)	3180-2¼ 795 (800-2¼)	3380-3 995 (1000-3)

