


APP CRS	Rwy Idg	9013
280°	TDZE	413
	Apt Elev	421

RNAV (RNP) Y RWY 28


SYRACUSE HANCOCK INTL (SYR)

RNP AR APCH.	ALSF-2	MISSED APPROACH: Climb to 3000 on track 280° to MOYIK and on track 306° to WIFFY and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to 1½. For inop ALS, increase RNP 0.30 all Cats visibility to 1%.		

ATIS	SYRACUSE APP CON	SYRACUSE TOWER	GND CON	CLNC DEL
124.225	126.125 269.125	120.3 239.0	121.7 348.6	125.05 257.775

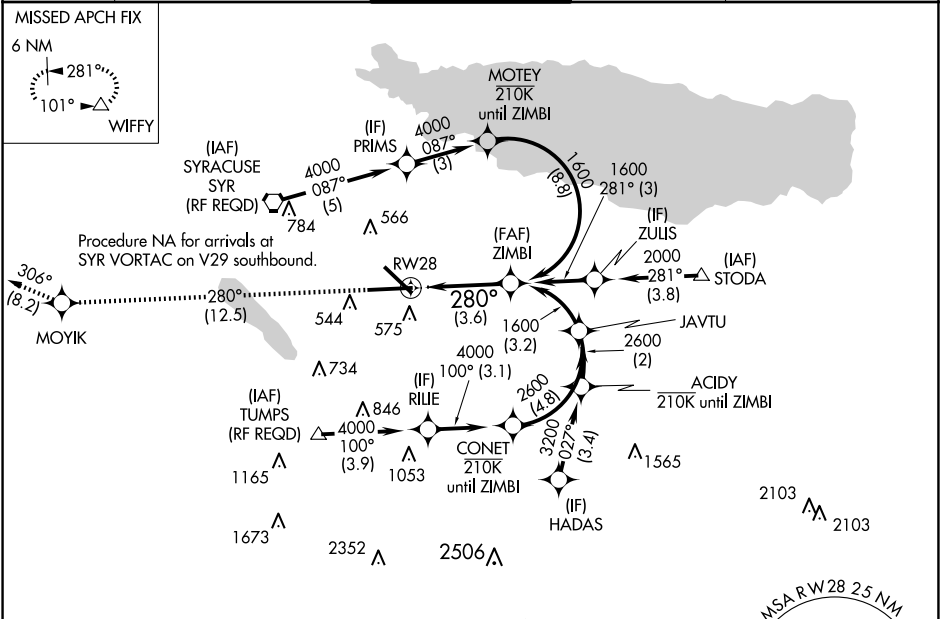

ELEV 421	D	TDZE 413
----------	---	----------



3000	MOYIK	WIFFY	See planview for multiple IF locations.	ZIMBI
tr 280°		tr 306°		1600
GP 3.00° TCH 78				
3.6 NM				
CATEGORY	A	B	C	D
RNP 0.15 DA		862/55	449 (500-1)	
RNP 0.30 DA		957-1½	544 (600-1%)	
AUTHORIZATION REQUIRED				

NE-2, 04 SEP 2025 to 02 OCT 2025

NE-2, 04 SEP 2025 to 02 OCT 2025