



TAMPA DEP CON
118.8 239.3
D-ATIS
128.475
CLNC DEL
133.6
CPDLC
GND CON
121.7 269.4
TAMPA TOWER
119.5 269.4

RNAV 1 - DME/DME/IRU or GPS required.
RADAR required.

TOP ALTITUDE:
6000

TAKEOFF MINIMUMS
Rwys 1L/R, 19R, 28: Standard.
Rwy 10: Standard with minimum climb
of 240'/NM to 800.
Rwy 19L: Standard with minimum climb
of 230'/NM to 300.

NOTE: Jet aircraft only.
NOTE: WILON TRANSITION for use by aircraft filed
to Jacksonville area airports only,
or as assigned by ATC.

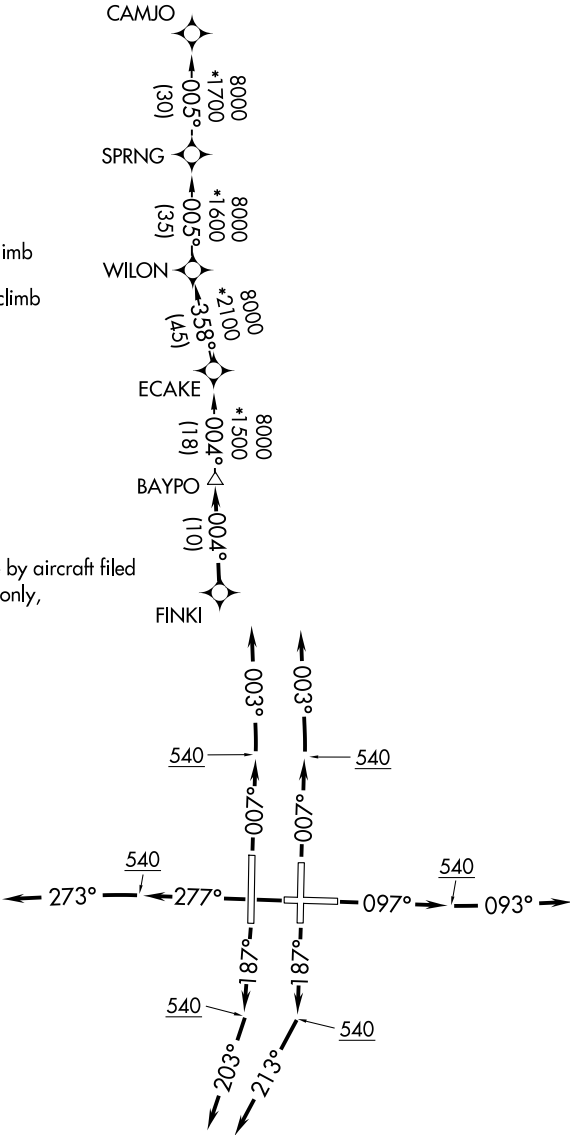

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025