
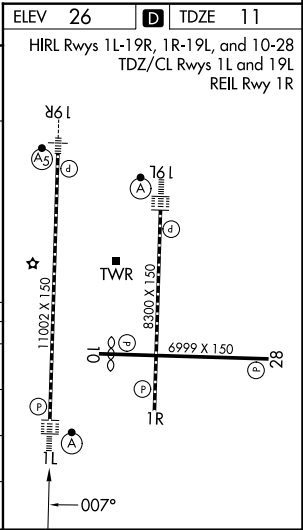
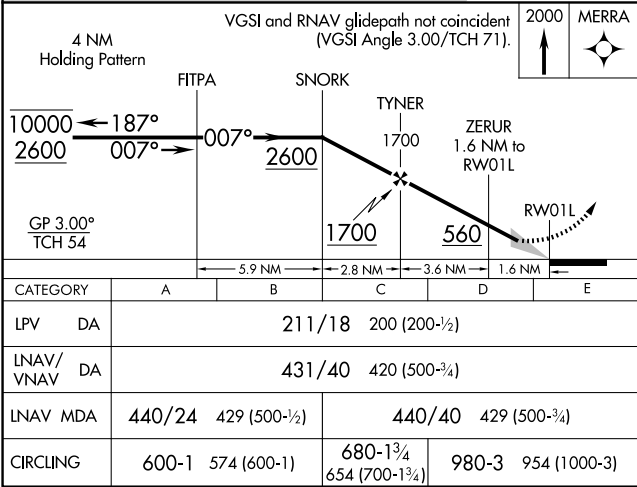


WAAS CH 50406 W01A	APP CRS 007°	Rwy Ldg 10800 TDZE 11 Apt Elev 26
--	------------------------	--

RNAV (GPS) Y RWY 1L

TAMPA INTL (TPA)

RNP APCH - GPS.				ALSIF-2		MISSED APPROACH: Climb to 2000 direct MERRA and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALSIF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 6000, and LNAV Cat E visibility to 1¼ SM. Simultaneous approach authorized with Rwy 1R. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.							
ARR	D-ATIS	DEP	TAMPA APP CON	TAMPA TOWER	GND CON	CLNC DEL	CPDLC
126.45	128.475		118.5 307.175	119.5 269.4	121.7 269.4	133.6	

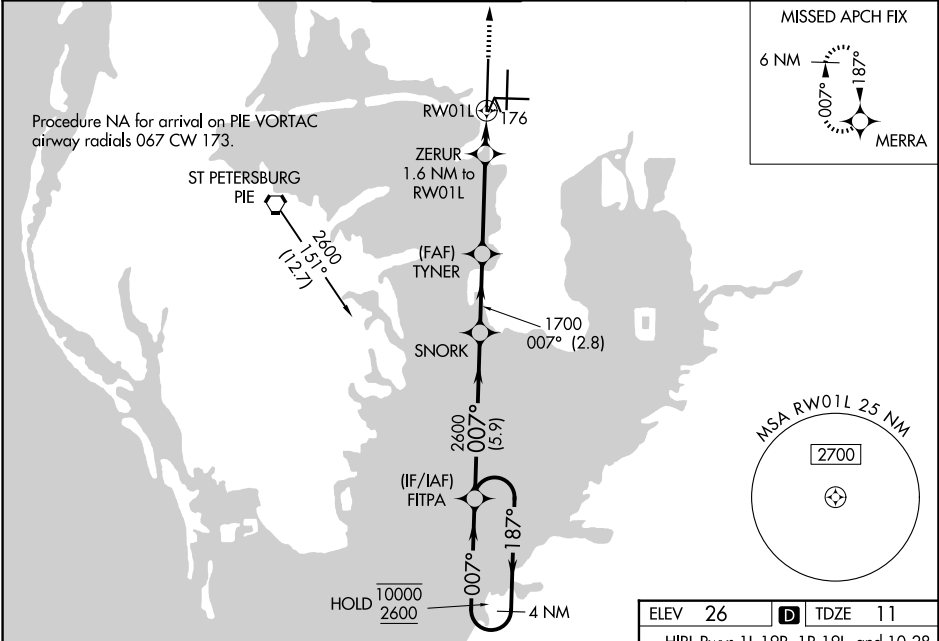

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025