

WAAS Ch 87099 W13A	APP CRS 130°	Rwy Idg 4559 TDZE 388 Apt Elev 390
--	------------------------	---


RNAV (GPS) RWY 13
TEXARKANA RGNI-WEBB FLD (TXK)

RNP APCH - GPS.	
-----------------	--


A Baro-VNAV and VDP NA when using De Queen altimeter setting. Rwy 13 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use De Queen altimeter setting and increase LPV DA to 748 feet and all Cats visibility $\frac{1}{4}$ SM, LNAV/VNAV DA to 868 feet all Cats visibility $\frac{3}{8}$ SM, and all MDAs 100 feet and LNAV and Circling Cats C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2000 direct
WATLE and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER ★ 123.875 (CTAF) 0 235.625	GND CON 119.225
----------------------	---	--	---------------------------

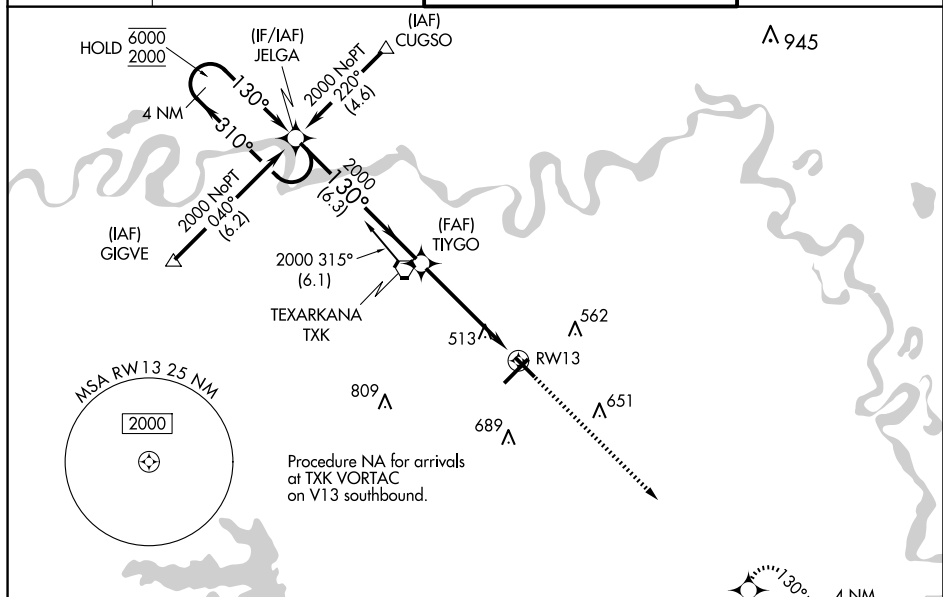

ELEV 390	D	TDZE 388
----------	----------	----------



4 NM Holding Pattern

JELGA

TIYGO

2000

310°

130°

130°

2000

GP 3.00° TCH 54

1.2 NM to RW13

RW13

6.3 NM

3.8 NM

1.2 NM

2000

WATLE

CATEGORY	A	B	C	D
LPV DA		648- $\frac{3}{4}$	260 (300- $\frac{3}{4}$)	
INAV/ VNAV DA		768-1	380 (400-1)	
INAV MDA	780-1	392 (400-1)	780-1 $\frac{1}{8}$	392 (400-1 $\frac{1}{8}$)
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)	1000-1 $\frac{3}{4}$ 610 (700-1 $\frac{3}{4}$)	1080-2 $\frac{1}{4}$ 690 (700-2 $\frac{1}{4}$)

MIRL Rwy 13-31 **L**HIRL Rwy 4-22 **L**

TEXARKANA, ARKANSAS

Orig-D 10AUG23

TEXARKANA RGNL-WEBB FLD (TXK)

RNAV (GPS) RWY 13

33°27'N-93°59'W