

WAAS Ch 93899 W04A	APP CRS 040°	Rwy Idg 6602 TDZE 360 Apt Elev 390
--	------------------------	---

RNAV (GPS) RWY 4

TEXARKANA RGNL-WEBB FLD (TXK)


▼

⚠

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use J Lynn Helms Sevier County altimeter setting and increase all DA/MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, LNAV and Circling Cat C and D visibility ½ mile. Baro-VNAV NA when using J Lynn Helms Sevier County altimeter setting.

MISSED APPROACH:
Climb to 2100 direct WORPA and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER ★ 123.875 (CTAF) 0 235.625	GND CON 119.225
----------------------	---	--	---------------------------

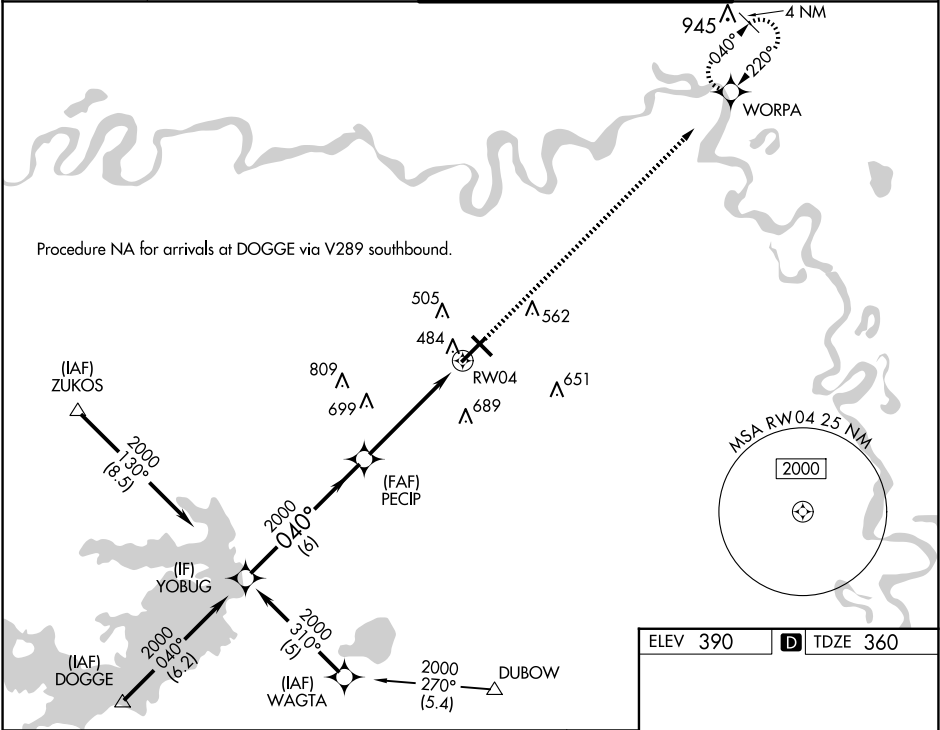

Procedure YOBUG		PECIP		2100	WORPA
Turn NA		2000		2000	
GP 3.00°		040°		RW04	
TCH 52		6 NM		5 NM	
CATEGORY	A	B	C	D	
LPV DA	613-1		253 (300-1)		
LNAV/VNAV DA	866-1¾		506 (500-1¾)		
LNAV MDA	900-1	540 (600-1)	900-1½	900-1¾	
			540 (600-1½)	540 (600-1¾)	
CIRCLING	900-1¾	510 (600-1¾)	1000-2	1080-2¼	
			610 (700-2)	690 (700-2¼)	

ELEV 390 **D** TDZE 360

TWR 455

MRL Rwy 13-31 0

HIRL Rwy 4-22 0