

WAAS CH 66100 W13A	APP CRS 132°	Rwy Ldg 12803 TDZE 1066 Apt Elev 1078
--	------------------------	--

RNAV (GPS) RWY 13

TOPEKA RGNL (FOE)


RNP APCH

When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats visibility 1/8 SM, LNAV Cat C visibility 1/8 SM and Circling Cat D visibility 1/4 SM. Baro-VNAV and VDP NA when using Philip Billard Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.

MALSF

MISSED APPROACH:
Climb to 3000 direct
ERJAG and hold.

ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER★ 120.8 (CTAF) 340.2	GND CON 118.425 275.8	UNICOM 122.95
-----------------------	--	--	---------------------------------	-------------------------

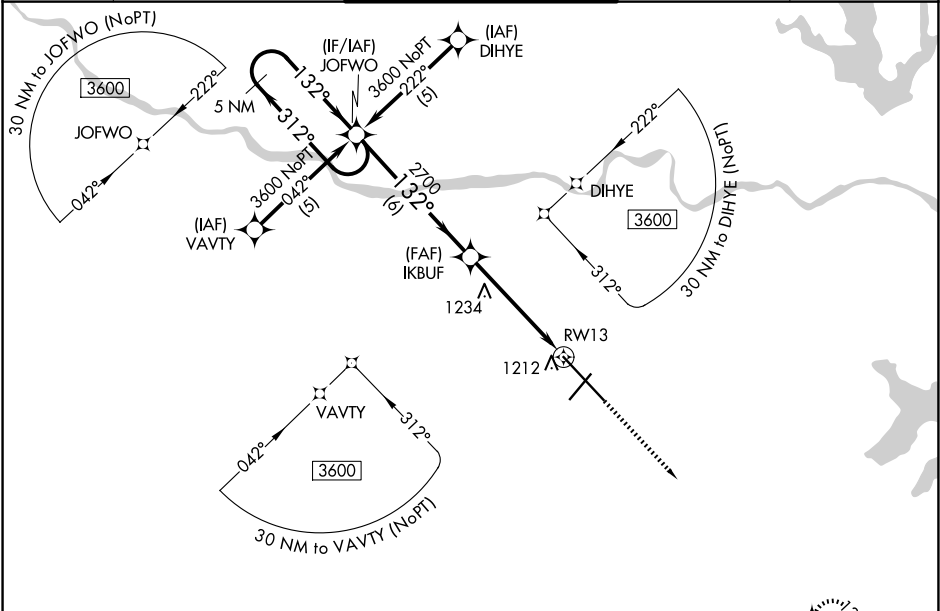

ELEV 1078

D

TDZE 1066

REIL Rwys 3, 13 and 21

MIRL Rwy 3-21

HIRL Rwy 13-31

5 NM Holding Pattern JOFWO IKBUF GP 3.00° TCH 52 3600 312° 132° 132° 2700 6 NM 3.6 NM 1.3 NM 3000 ERJAG *1.3 NM to RW13 *LNAV only.				
CATEGORY	A	B	C	D
LPV DA	1316-3/4 250 (300-3/4)			
LNAV/VNAV DA	1506-1 1/2 440 (500-1 1/2)			
LNAV MDA	1540-1	474 (500-1)	1540-1 3/8 474 (500-1 3/8)	1540-1 1/2 474 (500-1 1/2)
CIRCLING	1540-1 462 (500-1)	1580-1 502 (600-1)	1580-1 1/2 502 (600-1 1/2)	1700-2 622 (700-2)