

LOC I-TVC	APP CRS	Rwy Ldg
110.7	279°	7016
		TDZE
		616
		Apt Elev
		624

ILS or LOC RWY 28

CHERRY CAPITAL (TVC)

RNP APCH - GPS.

Aircraft not GPS equipped - RADAR required for procedure entry.

MALSRR

MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.


⚠

S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 1/2 SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.

❄

-21°C

ATIS	MINNEAPOLIS CENTER	TRAVERSE CITY TOWER ★	GND CON	UNICOM
119.175	132.9 338.3	124.2 (CTAF) 348.6	121.8 348.6	122.95

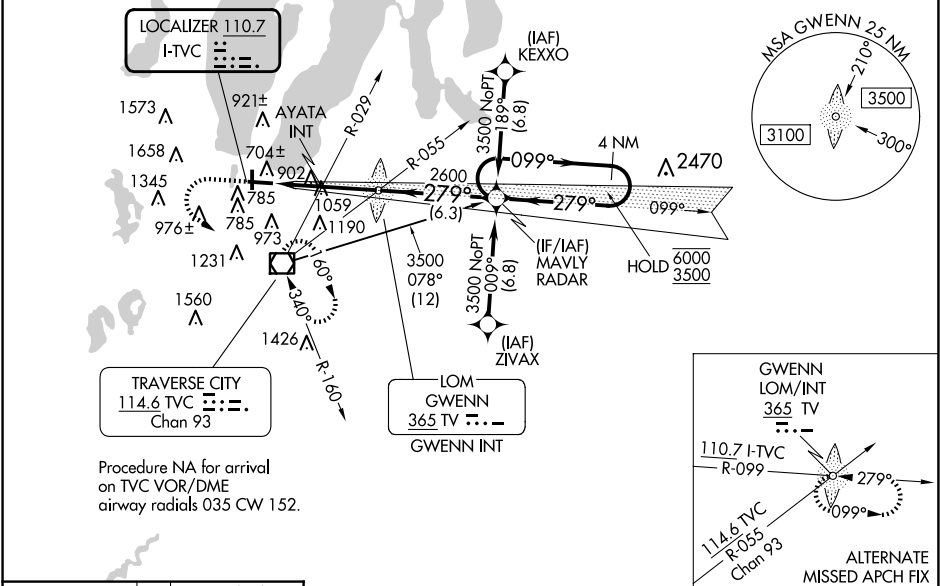

ELEV 624	D	TDZE 616
----------	---	----------

1100

3000

TVC

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).

HIRL Rwy 10-28

MIRL Rwy 18-36

REIL Rwy 36

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

CATEGORY	A	B	C	D
S-ILS 28	816-1/2 200 (200-1/2)			
S-LOC 28	1440-1/2 824 (900-1/2)	1440-3/4 824 (900-3/4)	1440-1 824 (900-1)	824 (900-1 1/2)
CIRCLING	1440-1 1/4 816 (900-1 1/4)	1440-2 1/2 816 (900-2 1/2)	1720-3 1096 (1100-3)	
AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 28	1320-1/2 704 (700-1/2)	1320-1 704 (700-1)	1720-3 1096 (1100-3)	
CIRCLING	1320-1 696 (700-1)	1420-2 1/4 796 (800-2 1/4)	1720-3 1096 (1100-3)	