


WAAS CH 42610 W10A	APP CRS 099°	Rwy Ldg TDZE 624 Apt Elev 624
--	------------------------	---

RNAV (GPS) RWY 10

CHERRY CAPITAL (TVC)

RNP APCH.	▼ ▲ ❄ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Rwy 10 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase LPV visibility all Cats ½ SM. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cats C/D.	MALSR 	MISSED APPROACH: Climb to 4000 direct ROPTe and on track 157° to LADIN and hold.
-----------	--	-----------	--

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER* 124.2 (CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

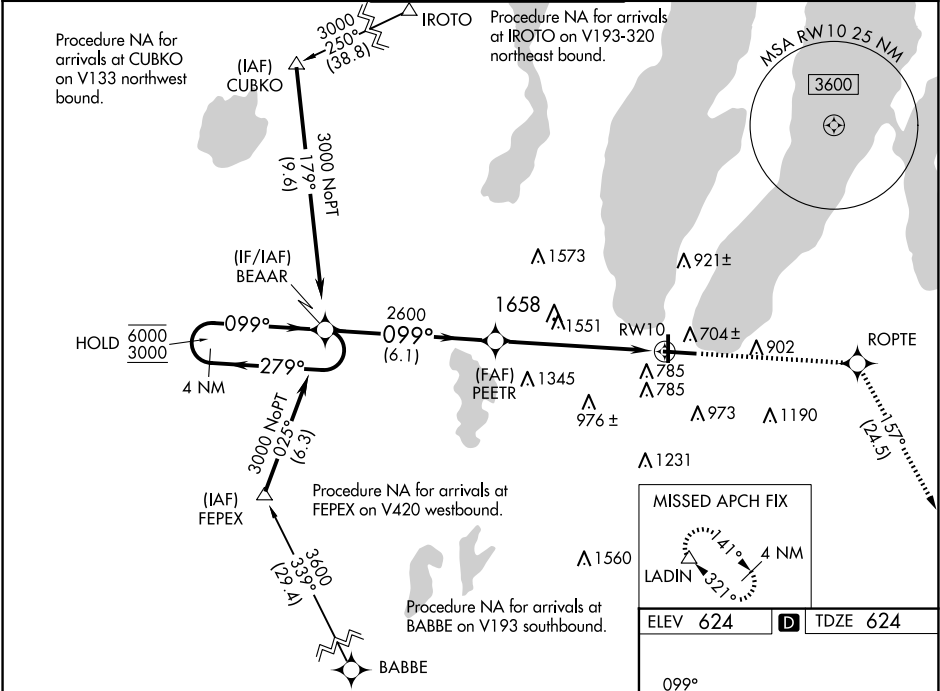

4 NM Holding Pattern		BEAAR		PEETR	4000 ↑	ROPTe ✦	tr 157°	LADIN △
6000 ← 279° 3000 → 099°		099°		2600	* 3.4 NM to RW10		* LNAV only.	
GP 3.00° TCH 52				2600			RW10	
		6.1 NM		2.6 NM	3.4 NM			
CATEGORY	A	B	C	D				
LPV DA	909-¾		285 (300-¾)					
LNAV/ VNAV DA	1983-5		1359 (1400-5)					
LNAV MDA	1780-¾ 1156 (1200-¾)	1780-1 1156 (1200-1)	1780-3 1156 (1200-3)					
CIRCLING	1780-1¼ 1156 (1200-1¼)	1780-1½ 1156 (1200-1½)	1780-3 1156 (1200-3)					

