

WAAS CH 93504 W18A	APP CRS 180°	Rwy Idg TDZE 641 Apt Elev 678
--	------------------------	---

RNAV (GPS) RWY 18L

TULSA INTL (TUL)

RNP APCH - GPS.


ASR

Circling NA for Cat E south of Rwy 8-26. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cat E visibility to 1¼ SM. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.


MALSR

MISSED APPROACH: Climb to 3500 direct ICECE and hold.

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (Rwys 18L-36R, 8-26) 118.7 257.8 (Rwy 18R-36L)	GND CON 121.9 348.6	CLNC DEL 134.05 284.7
------------------------------	-------------------------------------	--	-------------------------------	---------------------------------

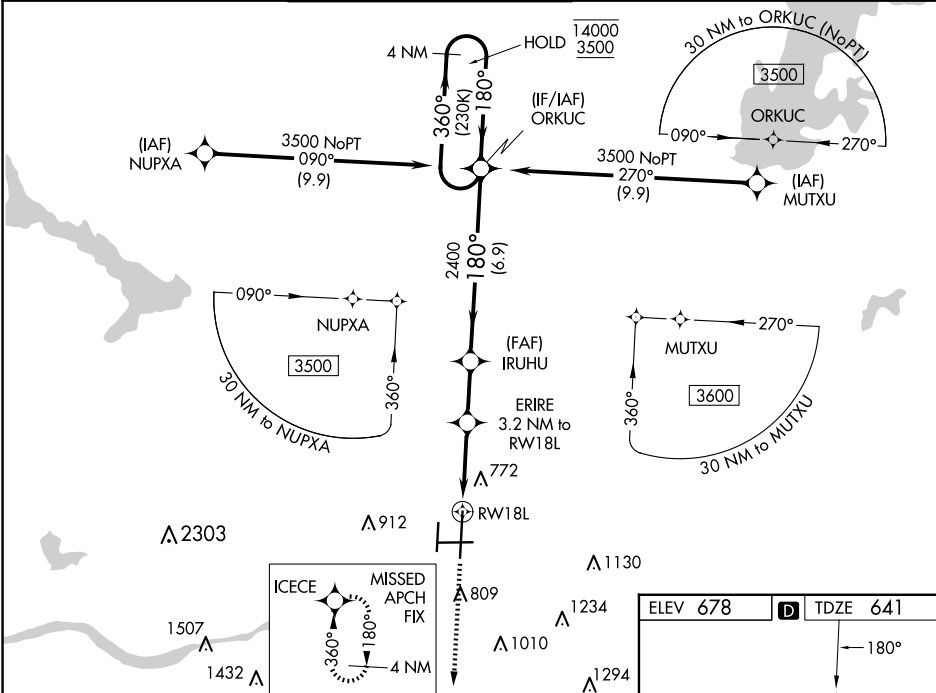

3500	ICECE	VGSI and RNAV glidepath not coincident (VGSI Angle 2.75/TCH 56).				4 NM Holding Pattern					
		A		B		C		D		E	
LPV DA		841/24 200 (200-½)									
LNAV/VNAV DA		983/30 342 (400-⅝)									
LNAV MDA		1080/24 439 (500-½)		1080/40 439 (500-¾)							
CIRCLING		1120-1 442 (500-1)		1160-1 482 (500-1)		1500-2½ 822 (900-2½)		1520-2¾ 842 (900-2¾)		1520-3 842 (900-3)	

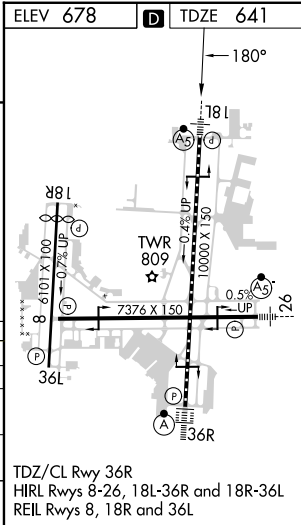

SC-1, 04 SEP 2025 to 02 OCT 2025

SC-1, 04 SEP 2025 to 02 OCT 2025