

WAAS CH 65919 W01A	APP CRS 007°	Rwy Ldg TDZE 511 Apt Elev 516
--	------------------------	---

RNAV (GPS) RWY 1

WACO RGNL (ACT)


RNP APCH - GPS.

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Baro-VNAV and VDP NA when using PWG altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use PWG altimeter setting and increase LPV DA to 792 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 813 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 3000 direct CHRUS and hold.

ATIS 123.85	WACO APP CON ★ 127.65 227.125	WACO TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

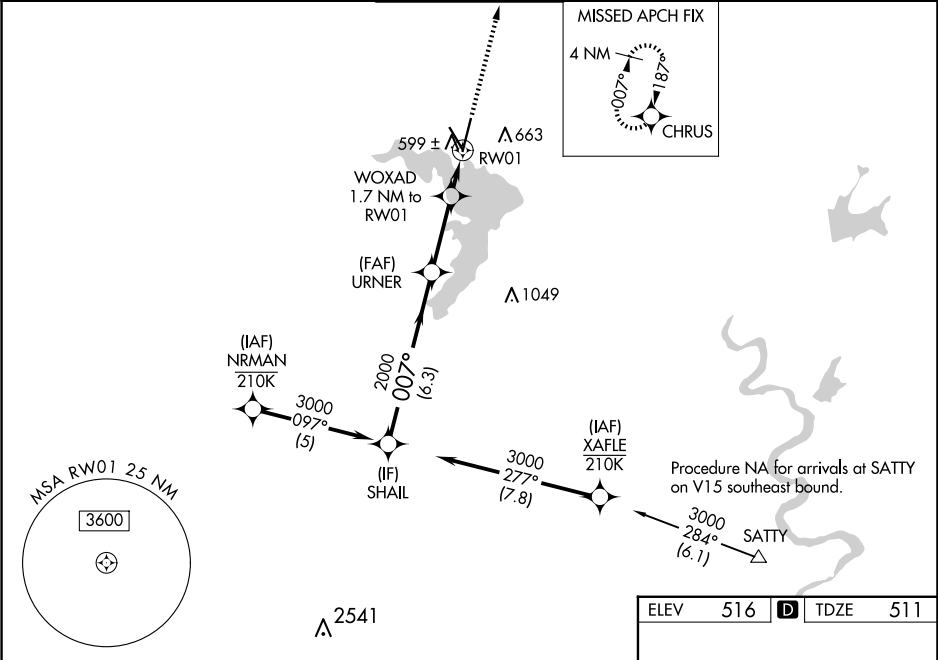

SHAIL		URNER		WOXAD 1.7 NM to RW01		3000 CHRUS	
3000		2000		1100		0.9 NM to RW01	
GP 3.00° TCH 55		6.3 NM		2.8 NM		0.8 NM	
CATEGORY		A		B		C	
LPV DA		761-¾		250 (300-¾)			
LNAV/VNAV DA		782-7/8		271 (300-7/8)			
LNAV MDA		860-1		349 (400-1)			
CIRCLING		940-1 424 (500-1)		980-1 464 (500-1)		1020-1½ 504 (600-1½)	
						1160-2 644 (700-2)	

ELEV 516

TDZE 511

61

7107 X 150

5103 X 150

TWR

REIL Rwy 14

HIRL Rwy 1-19

MIRL Rwy 14-32