

WAAS CH 69420 W32A	APP CRS 322°	Rwy Ldg TDZE 516 Apt Elev 516
--	------------------------	---

RNAV (GPS) RWY 32

WACO RGNL (ACT)



⚠

ASR

DME/DME RNP-0.3 NA. When local altimeter setting not received use Mc Gregor Exec altimeter setting and increase all DA 31 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 54°C (130°F). Baro-VNAV NA when using Mc Gregor Exec altimeter setting. VDP NA with Mc Gregor Exec altimeter setting.

MISSED APPROACH:
Climb to 4000 direct EVVIS and hold, continue climb-in-hold to 4000.

ATIS 123.85	WACO APP CON ★ 127.65 227.125	WACO TOWER ★ 119.3(CTAF) 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

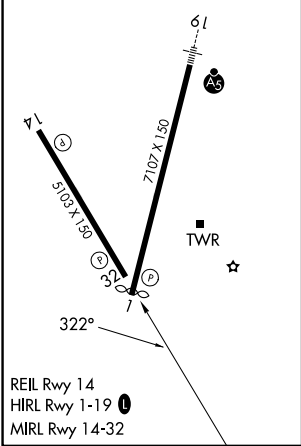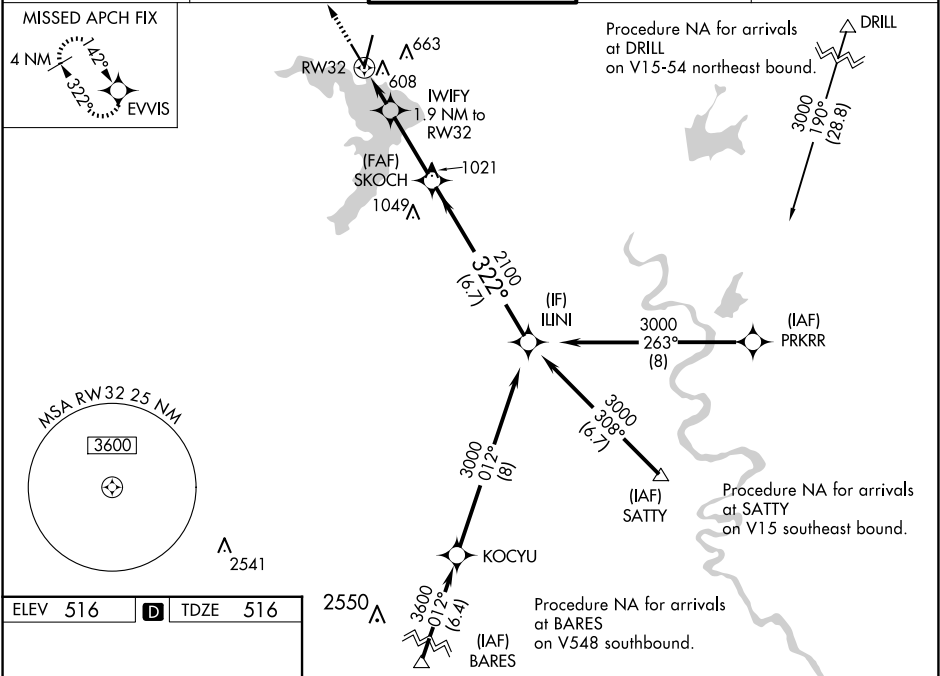

CATEGORY				
A				
B				
C				
D				
LPV DA				
LNAV/VNAV DA				
LNAV MDA				
CIRCLING				