

VORTAC ACT	APP CRS	Rwy Ldg	5103
115.3	321°	TDZE	516
Chan 100		Apt Elev	516



VOR/DME RWY 32
WACO RGNL (ACT)

ASR

VDP NA with Mc Gregor Exec altimeter setting. When local altimeter setting not received use Mc Gregor Exec altimeter setting and increase all MDA 40 feet; increase S-32 Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile.

MISSED APPROACH: Climb to 3000 direct ACT VORTAC and hold, continue climb-in-hold to 3000.

ATIS 123.85	WACO APP CON* 127.65 227.125	WACO TOWER* 119.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------	---------------------------------	-----------------------------------	------------------	------------------

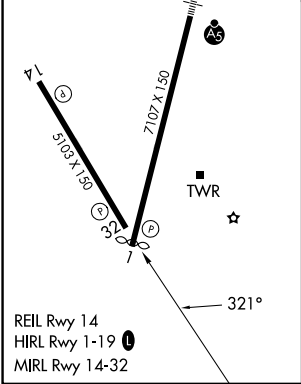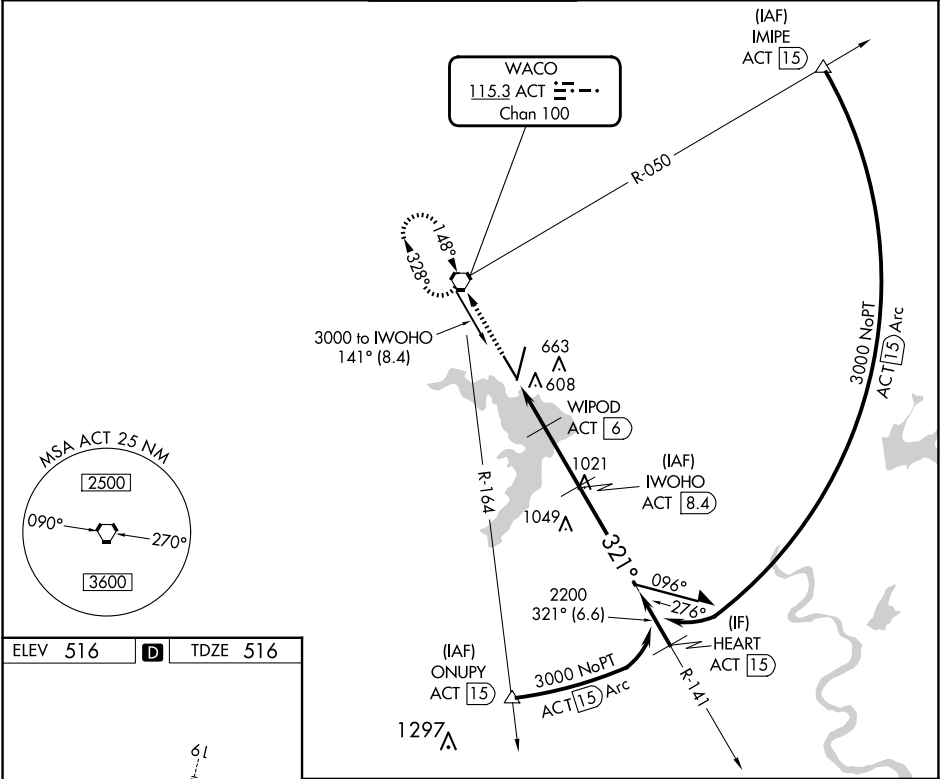

ELEV 516	D	TDZE 516
REIL Rwy 14	HIRL Rwy 1-19	MIRL Rwy 14-32
3000 ACT	WIPOD ACT 6	IWOHO ACT 8.4
ACT 4	ACT 4.9	ACT 15
1300	2200	3000
0.9	1.1	2.4
CATEGORY	A	B
S-32	860-1	344 (400-1)
CIRCLING	940-1 424 (500-1)	980-1 464 (500-1)
	1020-1 1/2 504 (600-1 1/2)	1160-2 644 (700-2)