

WAAS CH 45825 W36A	APP CRS 359°	Rwy Ldg TDZE 274 Apt Elev 279
--	------------------------	---

RNAV (GPS) RWY 36


WALNUT RIDGE RGNL (ARG)

⚠

Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 528 feet, LNAV/VNAV DA to 628 feet, and all MDAs 60 feet; increase LNAV Cats C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct EYPEB and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

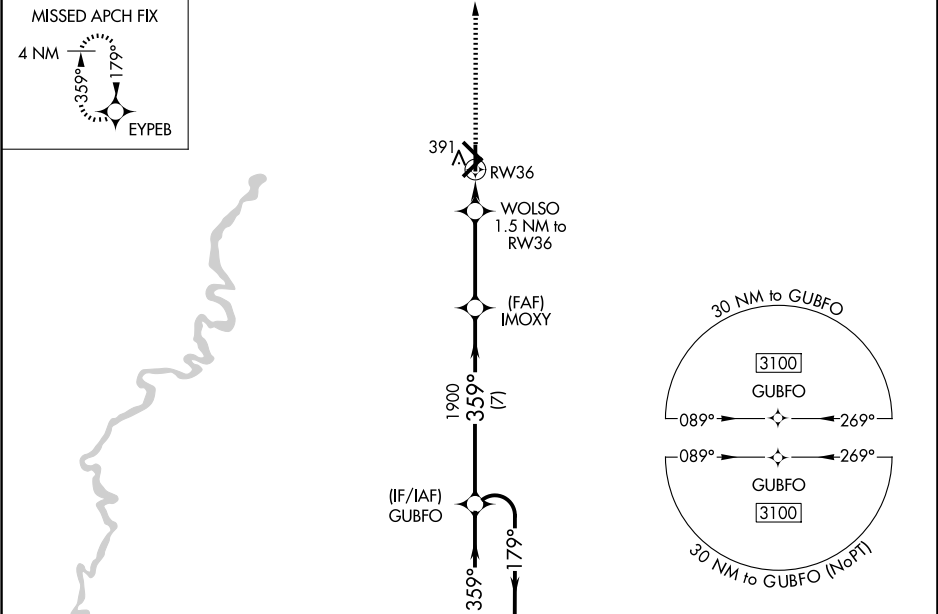

2700 EYPEB *LNAV only.		IMOXY 1900 GUBFO 4 NM Holding Pattern WOLSO 1.5 NM to RW36 RW36 780* 359° 179° 359° 3100 1900 GP 3.00° TCH 45°		
CATEGORY	A	B	C	D
LPV DA	474-1		200 (200-1)	
LNAV/VNAV DA	574-1		300 (300-1)	
LNAV MDA	660-1 386 (400-1)		660-1 1/8 386 (400-1 1/8)	
CIRCLING	760-1 481 (500-1)		800-1 1/2 521 (600-1 1/2)	1000-2 1/4 721 (800-2 1/4)

ELEV 279

TDZE 274

31

81

36

5003 X 150

5001 X 150

6001 X 150

35

36

35

359°

REIL Rwy 18

MIRL Rwy 4-22, 18-36