

WAAS CH 77825 W04A	APP CRS 044°	Rwy Ldg 6001 TDZE 279 Apt Elev 279
--	------------------------	---

RNAV (GPS) RWY 4
WALNUT RIDGE RGNL (ARG)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. Inop table does not apply to LPV and LNAV/VNAV all Cats.

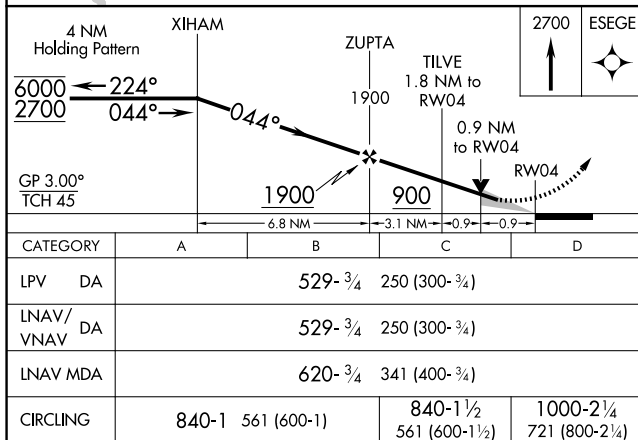
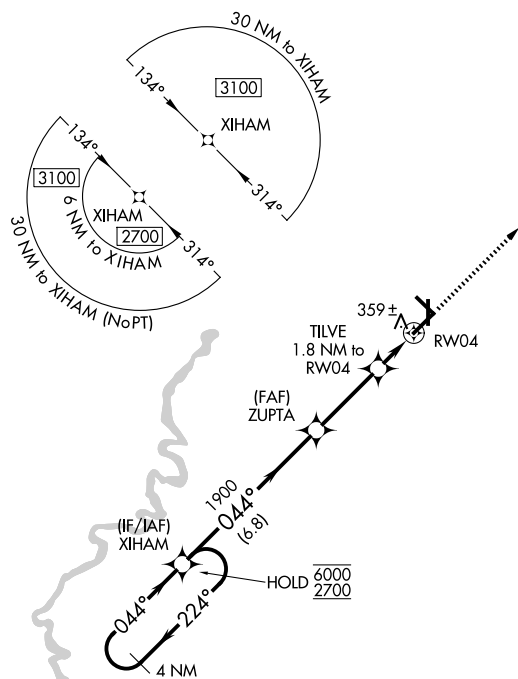
MALSF



MISSED APPROACH: Climb to 2700 direct ESEGE and hold.

AWOS-3PT
126.525

MEMPHIS CENTER
120.075 289.4

UNICOM
122.8 (CTAF) **L**

CATEGORY	A	B	C	D
LPV DA	529- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/ VNAV DA	529- ³ / ₄ 250 (300- ³ / ₄)			
LNAV MDA	620- ³ / ₄ 341 (400- ³ / ₄)			
CIRCLING	840-1 561 (600-1)	840-1 1/2 561 (600-1 1/2)	1000-2 1/4 721 (800-2 1/4)	

