

WAAS CH 97317 W10A	APP CRS 099°	Rwy Ldg 8151 TDZE 16 Apt Elev 20
--	------------------------	---

RNAV (GPS) Y RWY 10L
PALM BEACH INTL (PBI)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and increase LNAV Cats C/D visibility to RVR 6000.


RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct MORG and hold.

D-ATIS 123.75	PALM BEACH APP CON 128.3 317.4	PALM BEACH TOWER 119.1 257.8	GND CON 121.9 284.6	CLNC DEL 121.6 284.6	CPDLC
------------------	-----------------------------------	---------------------------------	------------------------	-------------------------	-------

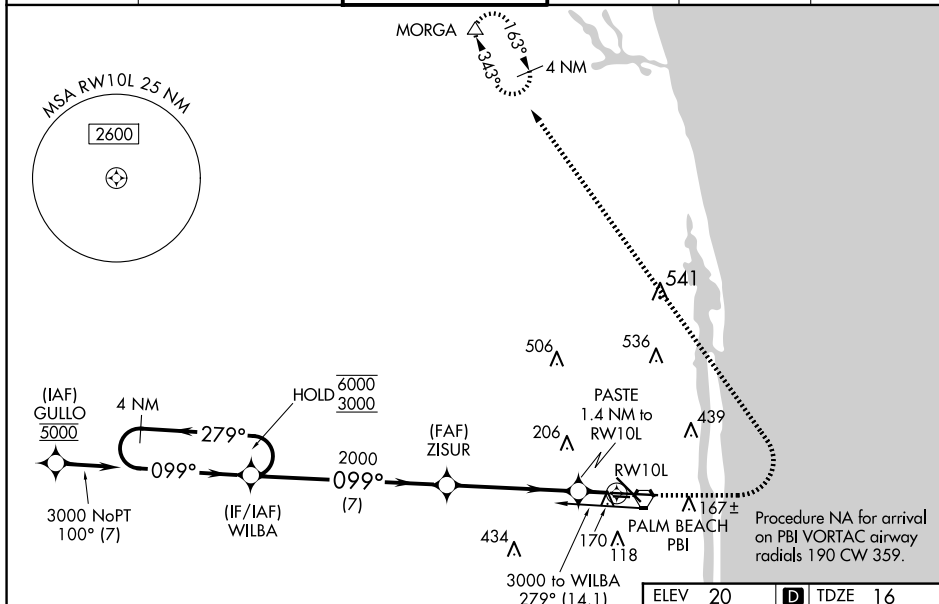

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 68).

4 NM
Holding Pattern

Activity	
-----------------	--

$\overline{6000} \xleftarrow{279^\circ}$
 $\overline{3000} \xrightarrow{099^\circ}$

GP 3.00°
 TCH 52


099°
 2000

		300	
	7 NM	4.7 NM	1.4 NM

CATEGORY	A	B	C	D
LPV DA #	216/24 200 (200-½)			
RNAV/ VNAV DA	392/35 376 (400-¾)			
RNAV MDA	420/24 404 (400-½)	420/40 404 (400-¾)		
C CIRCLING	560-1 540 (600-1)	740-2 720 (800-2)	780-2½ 760 (800-2½)	

ELEV 20	D	TDZE 16
---------	----------	---------

10	10
----	----



WEST PALM BEACH, FLORIDA

Amdt 4 12AUG21

26°41'N-80°06'W

Palm Beach Intl (PBI)

RNAV (GPS) Y RWY 10L

HIRL Rwy 10L-28R
REIL Rwys 10R, 14, 28L, 28R and 32
MIRL Rwys 14-32 and 10R-28L

SE-3, 04 SEP 2025 to 02 OCT 2025