

WAAS
CH **45518**
W28A

APP CRS
279°

Rwy Ldg
TDZE **18**
Apt Elev **20**

RNAV (GPS) Y RWY 28R


PALM BEACH INTL (PBI)

RNP APCH - GPS.


▼ For uncompensated Baro-VNAV systems, procedure NA below 6°C or above 54°C.

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct MORGA and hold.

D-ATIS 123.75	PALM BEACH APP CON 128.3 317.4	PALM BEACH TOWER 119.1 257.8	GND CON 121.9 284.6	CLNC DEL 121.6 284.6	CPDLC
-------------------------	--	--	-------------------------------	--------------------------------	-------

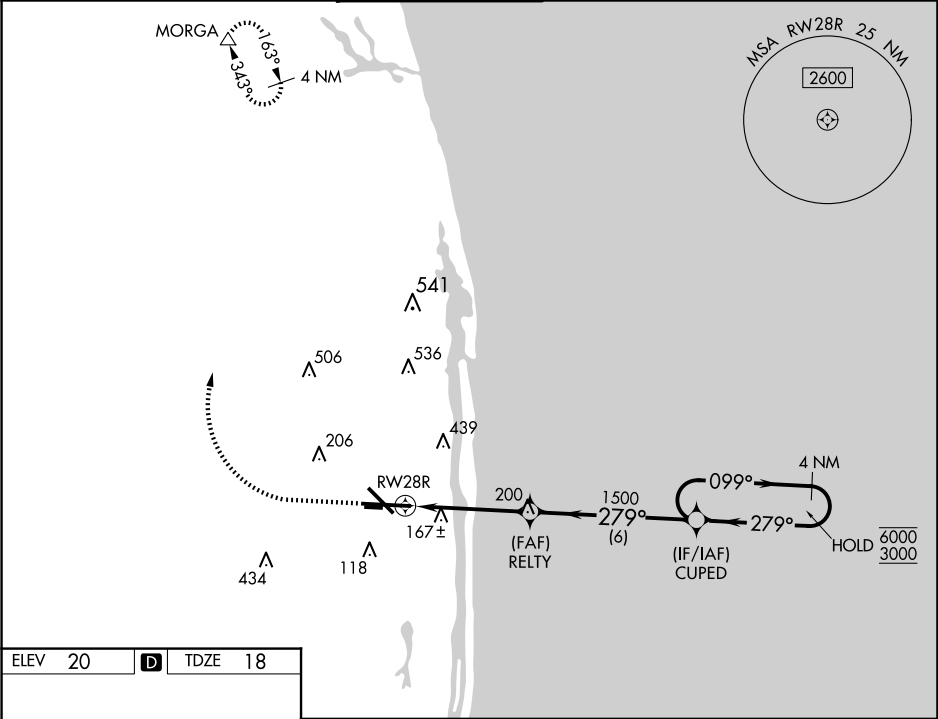

ELEV 20	D	TDZE 18
---------	----------	---------

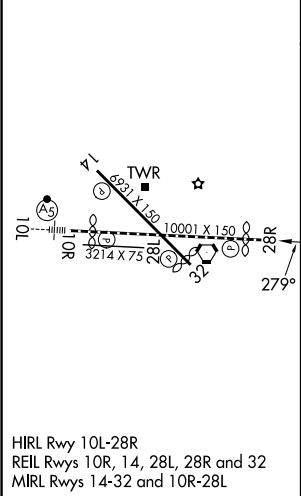

500

3000

MORGA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

4 NM Holding Pattern

RWY 28R

RELTY

CUPED

1.2 NM to RWY 28R

1500

279°

099°

6000

3000

GP 3.00° TCH 58

CATEGORY	A	B	C	D
LPV DA		218/40	200 (200-¾)	
LNAV/VNAV DA		342/50	324 (400-1)	
LNAV MDA	460/55	442 (500-1)	460-1⅓	442 (500-1⅓)
C CIRCLING	560-1	540 (600-1)	740-2 720 (800-2)	780-2½ 760 (800-2½)