
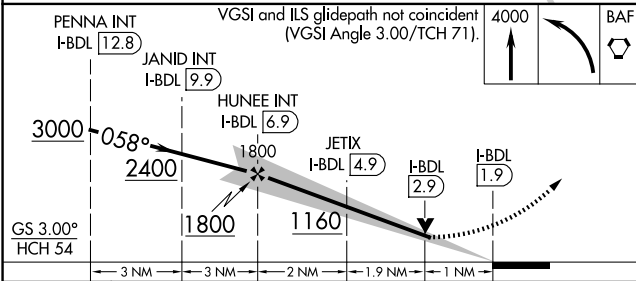


LOC/DME I-BDL	APP CRS	Rwy Ldg	9509
111.1	058°	TDZE	173
Chan 48		Apt Elev	173


COPTER ILS or LOC RWY 6
BRADLEY INTL (BDL)

RADAR required for procedure entry.		ALSIF-2	MISSED APPROACH: Climb to 4000 then left turn direct BAF VORTAC and hold.	
For inop ALS, increase H-ILS 6 visibility to RVR 2400 and H-LOC 6 visibility to RVR 4000.		A		

D-ATIS	YANKEE APP CON	BRADLEY TOWER	GND CON	CLNC DEL	CPDLC
118.15	123.95 290.55 (061°-240°)	120.3 351.8	121.9 348.6	121.75 322.3	
	125.35 281.5 (241°-060°)				

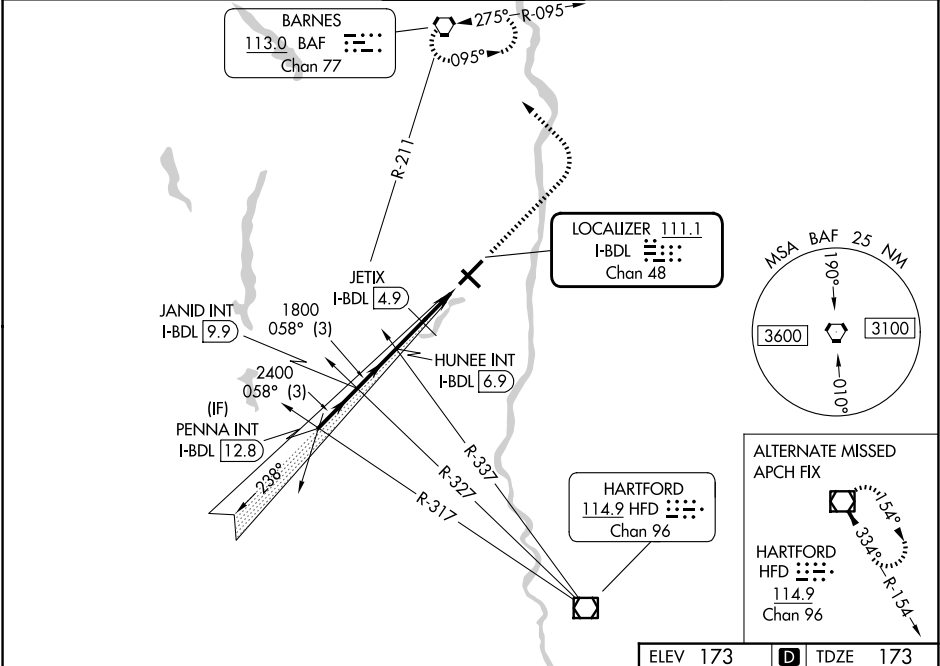

CATEGORY	COPTER
H-ILS 6	273/12 100 (100-¼)
H-LOC 6	1160/24 987 (1000-½)
H-ILS 6	CAT II RA 101
JETIX FIX MINIMUMS (DME REQUIRED)	
H-LOC 6	560/24 387 (400-½)

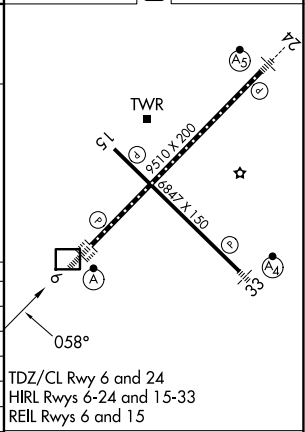

COPTER ILS CATEGORY II - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED					
FAF to MAP 4.9 NM					
Knots	45	60	75	90	105
Min:Sec	6:32	4:55	3:55	3:16	2:48