

LOC/DME I-YIP	APP CRS	Rwy Idg	7543
109.5	053°	TDZE	716
Chan 32		Apt Elev	716


ILS or LOC RWY 5
WILLOW RUN (YIP)

⚠ For inop ALS, increase S-LOC 5
Cats C/D visibility to 1 3/4 SM.

MALS

MISSED APPROACH: Climb to 1200 then climbing
left turn to 3000 direct SVM VORTAC and hold.

ATIS 127.425	DETROIT APP CON 118.95 284.0	WILLOW RUN TOWER 125.275 256.9	GND CON 119.975
-----------------	---------------------------------	-----------------------------------	--------------------

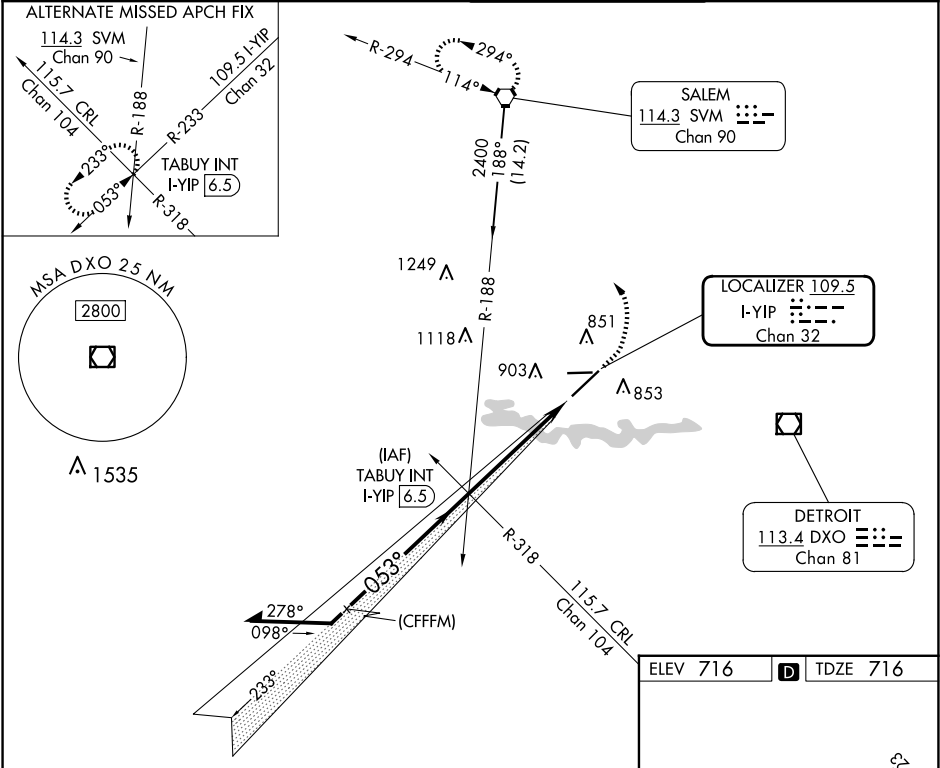

VGSI and ILS glidepath not coincident
(VGSI Angle 3.00/TCH 75).

Remain within 10 NM

2400 233° 053° 2400

GS 3.00° TCH 59

TABUY INT I-YIP 6.5

I-YIP 2.7 1.4

3.8 NM 1.3 NM

CATEGORY	A	B	C	D
S-ILS 5	916/18 200 (200-1/2)			
S-LOC 5	1200/24	484 (500-1/2)	1200/50	484 (500-1)
CIRCLING	1220-1	504 (600-1)	1220-1 1/2 504 (600-1 1/2)	1400-2 1/4 684 (700-2 1/4)

ELEV 716 **D** TDZE 716

TDZ/CL Rwy 5
HIRL Rwy 5-23
MIRL Rwy 9-27

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Seq	5:06	3:24	2:33	2:02	1:42

EC-1, 04 SEP 2025 to 02 OCT 2025

EC-1, 04 SEP 2025 to 02 OCT 2025