



|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>82400</b><br><b>W19A</b> | APP CRS<br><b>190°</b> | Rwy Idg <b>5036</b><br>TDZE <b>19</b><br>Apt Elev <b>22</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 19

CAPE MAY COUNTY (WWD)

|                                                                                                                                                                                                                    |                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| RNP APCH.                                                                                                                                                                                                          | MISSED APPROACH: Climb to 2500 direct SEWEL and hold, continue climb-in-hold to 2500. |
| For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.<br>Circling NA for Cats C and D NE of Rwy 19 and 28. Rwy 19 helicopter visibility reduction below 1 SM NA. Circling Rwy 1 NA at night. |                                                                                       |

|                            |                                               |                          |                                 |
|----------------------------|-----------------------------------------------|--------------------------|---------------------------------|
| AWOS-3PT<br><b>118.275</b> | ATLANTIC CITY APP CON<br><b>124.6 327.125</b> | CLNC DEL<br><b>121.7</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|----------------------------|-----------------------------------------------|--------------------------|---------------------------------|

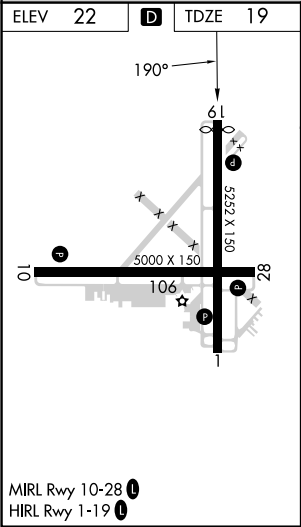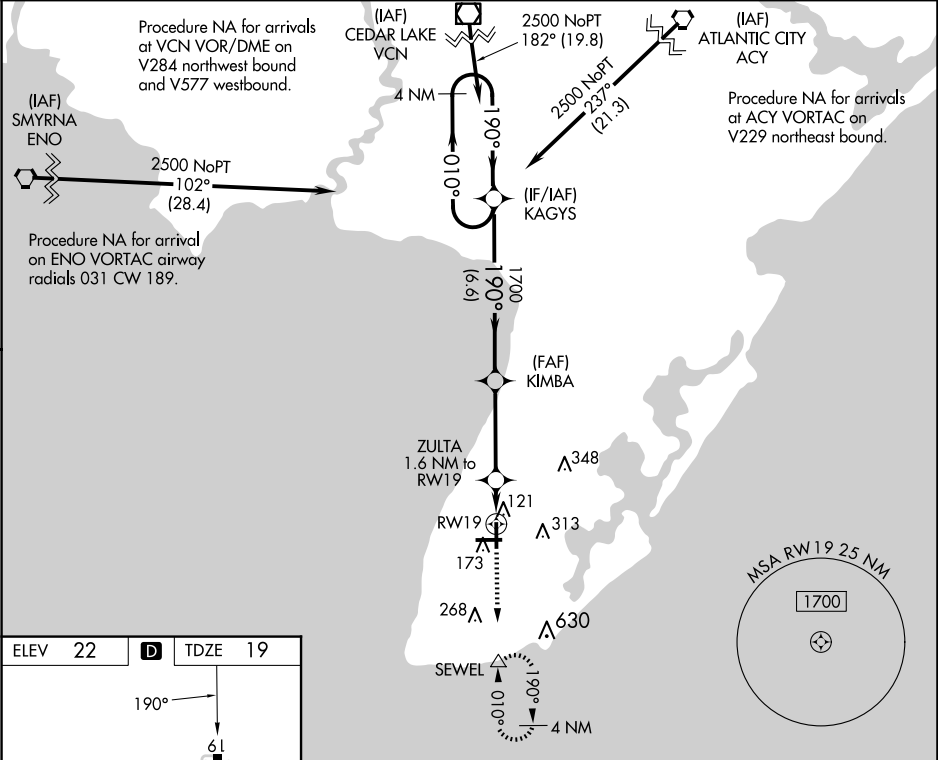

|                                                                                              |            |                         |                      |                        |                       |
|----------------------------------------------------------------------------------------------|------------|-------------------------|----------------------|------------------------|-----------------------|
| 2500<br>↑                                                                                    | SEWEL<br>△ | 4 NM Holding Pattern    |                      |                        |                       |
| *LNAV only.                                                                                  |            | KAGYS                   |                      |                        |                       |
| RW19                                                                                         |            | ZULTA<br>1.6 NM to RW19 | KIMBA<br>1700        | 190°                   | 010°→<br>←190° 2500   |
|                                                                                              |            | *560                    | 1700                 | GP 3.00°<br>TCH 40     |                       |
|                                                                                              |            | 1.6                     | 3.6 NM               | 6.6 NM                 |                       |
| CATEGORY                                                                                     |            | A                       | B                    | C                      | D                     |
| LPV DA                                                                                       |            | 269-1 250 (300-1)       |                      |                        |                       |
| LNAV/VNAV DA                                                                                 |            | 392-1¼ 373 (400-1¼)     |                      |                        |                       |
| LNAV MDA                                                                                     |            | 380-1 361 (400-1)       |                      |                        |                       |
|  CIRCLING |            | 480-1<br>458 (500-1)    | 620-1<br>598 (600-1) | 620-1½<br>598 (600-1½) | 980-3<br>958 (1000-3) |