



|                                              |                        |                                                     |
|----------------------------------------------|------------------------|-----------------------------------------------------|
| VORTAC GCK<br><b>113.3</b><br>Chan <b>80</b> | APP CRS<br><b>173°</b> | Rwy Idg<br>TDZE <b>2889</b><br>Apt Elev <b>2891</b> |
|----------------------------------------------|------------------------|-----------------------------------------------------|

VOR RWY 17  
GARDEN CITY RGNL (GCK)

**⚠** When local altimeter setting not received, use Dodge City Rgnl altimeter setting and increase all MDA 140 feet and Circling Cat C visibility ½ SM and Circling Cat D visibility ¼ SM. VDP NA when using Dodge City Rgnl altimeter setting.

**MISSED APPROACH:**  
Climb to 4000, then climbing left turn to 4500 direct GCK VORTAC and hold.

|                        |                                            |                                                     |                               |                         |
|------------------------|--------------------------------------------|-----------------------------------------------------|-------------------------------|-------------------------|
| ASOS<br><b>121.325</b> | KANSAS CITY CENTER<br><b>125.2 285.425</b> | GARDEN CITY TOWER ★<br><b>118.15 (CTAF) 0 254.4</b> | GND CON<br><b>119.0 254.4</b> | UNICOM<br><b>122.95</b> |
|------------------------|--------------------------------------------|-----------------------------------------------------|-------------------------------|-------------------------|

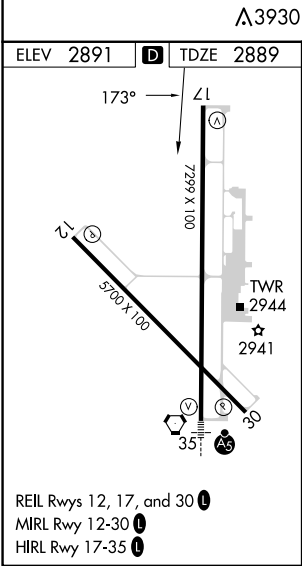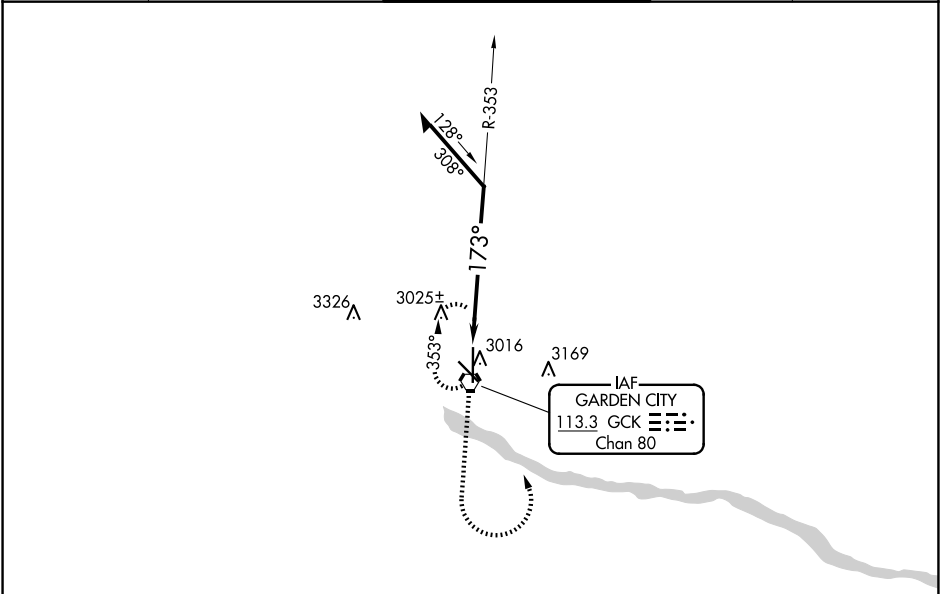

| 4000              | 4500                  | GCK                   | GCK VORTAC              |                         | Remain within 10 NM |
|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|---------------------|
|                   |                       |                       | 353°                    | 4500                    |                     |
|                   |                       |                       | GCK 2.5                 | 173°                    |                     |
|                   |                       |                       | 1.3 NM                  |                         |                     |
| CATEGORY          | A                     | B                     | C                       | D                       |                     |
| S-17              | 3340-1                | 451 (500-1)           | 3340-1¼<br>451 (500-1¼) | 3340-1½<br>451 (500-1½) |                     |
| <b>C</b> CIRCLING | 3340-1<br>449 (500-1) | 3360-1<br>469 (500-1) | 3480-1½<br>589 (600-1½) | 3480-2<br>589 (600-2)   |                     |