


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>86232</b><br><b>W13A</b> | APP CRS<br><b>126°</b> | Rwy Idg <b>5601</b><br>TDZE <b>593</b><br>Apt Elev <b>595</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 13  
SAN MARCOS RGNL (HYI)

|                                                                                                                                                                                                                                                                                                |                                       |                                                     |                           |                            |                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------------|---------------------------|----------------------------|-------------------------------------------------------------|
| RNP APCH-GPS.<br>⚠ Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats.<br>⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.<br>For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM. |                                       |                                                     |                           | MALS<br>⚠                  | MISSED APPROACH:<br>Climb to 3000 direct<br>HODAL and hold. |
| ATIS<br><b>120.825</b>                                                                                                                                                                                                                                                                         | AUSTIN APP CON<br><b>119.0 370.85</b> | SAN MARCOS TOWER★<br><b>126.825</b> (CTAF) <b>0</b> | GND CON<br><b>120.125</b> | CLNC DEL<br><b>120.125</b> | CLNC DEL<br><b>121.35</b><br>(when twr closed)              |

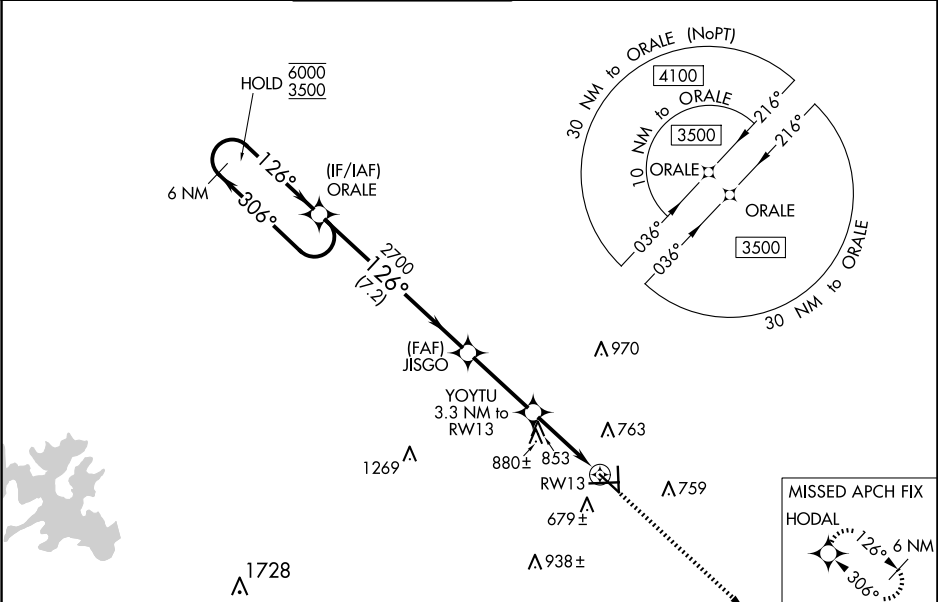

|                      |  |        |  |             |  |              |  |              |  |
|----------------------|--|--------|--|-------------|--|--------------|--|--------------|--|
| 6 NM Holding Pattern |  | ORALE  |  | JISGO       |  | YOYTU        |  | RW13         |  |
| 6000 ← 306°          |  | 126° → |  | 126°        |  | 126°         |  | 126°         |  |
| 3500                 |  | 2700   |  | 1700        |  | 1700         |  | 1700         |  |
| GP 3.00°             |  | TCH 57 |  | 7.2 NM      |  | 3.1 NM       |  | 1.8 NM       |  |
| CATEGORY             |  | A      |  | B           |  | C            |  | D            |  |
| LPV DA               |  |        |  | 793-¾       |  | 200 (200-¾)  |  |              |  |
| LNAV/VNAV DA         |  |        |  | 946-¾       |  | 353 (400-¾)  |  |              |  |
| LNAV MDA             |  | 1120-¾ |  | 527 (600-¾) |  | 1120-1¼      |  | 527 (600-1¼) |  |
| CIRCLING             |  | 1120-1 |  | 525 (600-1) |  | 1240-1¾      |  | 1320-2¼      |  |
|                      |  |        |  |             |  | 645 (700-1¾) |  | 725 (800-2¼) |  |
|                      |  |        |  |             |  |              |  | 1340-2¾      |  |
|                      |  |        |  |             |  |              |  | 745 (800-2¾) |  |

