


WAAS CH 78332 W26A	APP CRS 261°	Rwy Idg 6330 TDZE 587 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 26
SAN MARCOS RGNL (HYI)


T Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (33°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats, and LNAV Cat C/D/E visibility $\frac{1}{8}$ mile and Circling Cat C/D visibility $\frac{1}{4}$ mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 3000 direct
RAJRY and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
------------------------	---------------------------------------	--	---------------------------	----------------------------	--

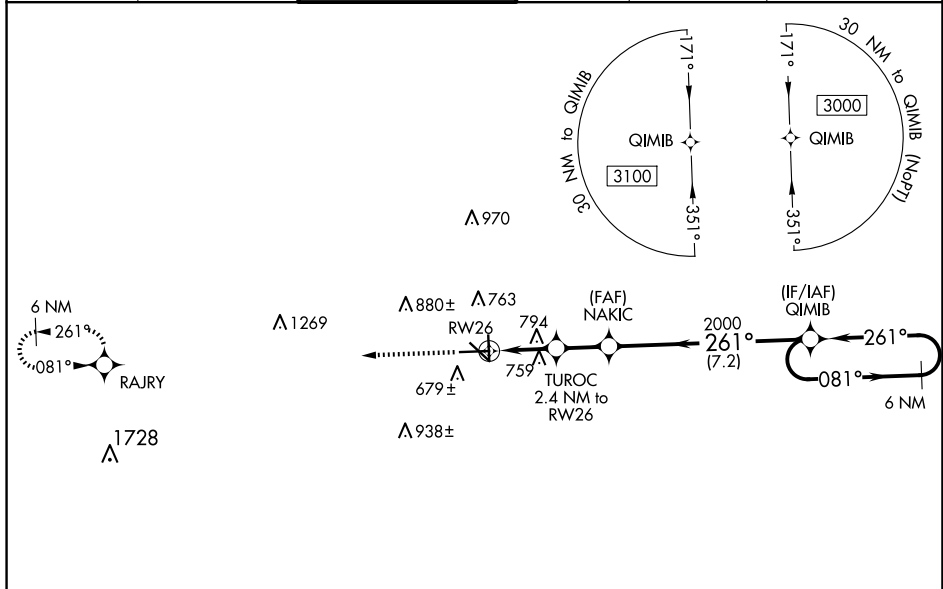

ELEV 595		TDZE 587
----------	--	----------



3000 ↑ RAJRY 		6 NM Holding Pattern 081° → 3000 ← 261°				
*LNAV only. TUROC 2.4 NM to RW26 1.3 NM to RW26 NAKIC 2000 1400 2000 261° QIMB GP 3.00° TCH 55						
1.3 NM 1.1 NM 1.9 NM 7.2 NM						
CATEGORY	A	B	C	D	E	
LPV DA	837-3/4 250 (300-3/4)					
LNAV/VNAV DA	866-7/8 279 (300-7/8)					
LNAV MDA	1060-1 473 (500-1)		1060-1 3/8 473 (500-1 3/8)			
C CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1 3/4 645 (700-1 3/4)	1320-2 1/4 725 (800-2 1/4)	1340-2 3/4 745 (800-2 3/4)	