


APP CRS	Rwy Ldg	6300
006°	TDZE	6431
	Apt Elev	6451

RNAV (RNP) Z RWY 1

JACKSON HOLE (JAC)

RNP APCH	For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C. Inop table does not apply to RNP 0.11* all Cats visibility. For inop ALS, increase RNP 0.30* all Cats visibility to ¾ SM. Missed approach requires RNP less than 1.0.	MALS	MISSED APPROACH: Climb to 14000 on track 007° to UBEVE and track 007° to QUIRT and track 088° to DNW VOR/DME and hold, continue climb-in-hold to 14000. * Missed approach requires minimum climb of 330 feet per NM to 8200; if unable to meet climb gradient, see RNAV (RNP) Y RWY 1.
----------	---	------	---


D-ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF)	GND CON 124.55	UNICOM 122.95
-------------------	----------------------------------	----------------------------------	-------------------	------------------

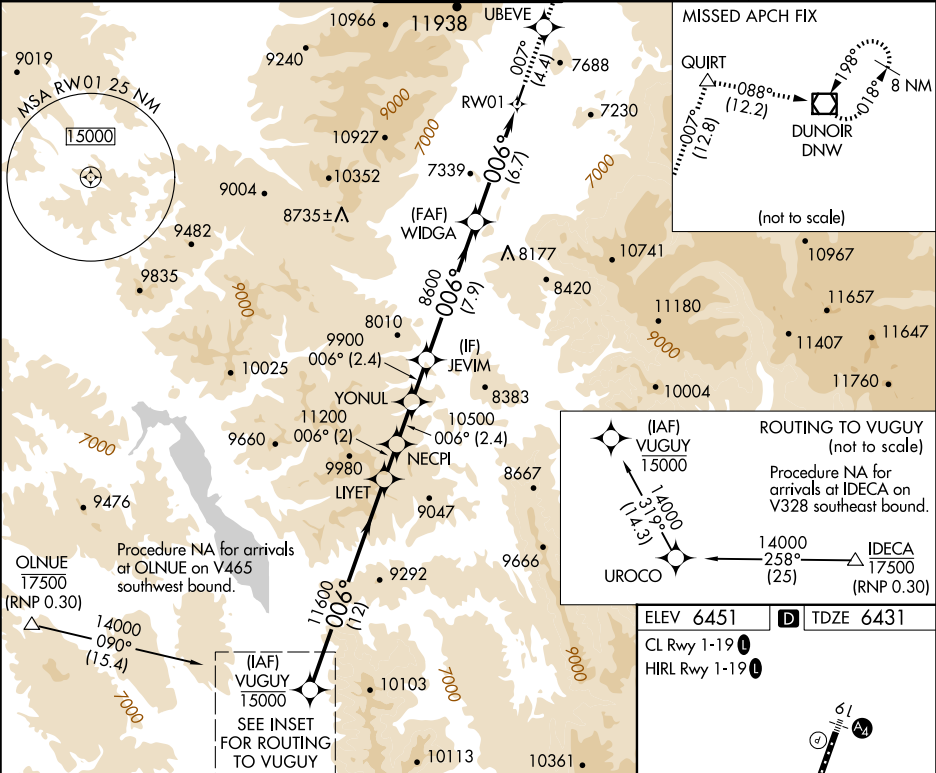

VUGUY	LYET	NECPI	YONUL	JEVIM	WIDGA	RWY 01
15000	11600	11200	10500	9900	8600	
GP 3.00°						
TCH 50						
	12 NM	2 NM	2.4	2.4	7.9 NM	6.7 NM
CATEGORY	A	B	C	D		
RNP 0.11 DA*		6690-¾	259 (300-¾)			
RNP 0.30 DA*		6743-¾	312 (300-¾)			

AUTHORIZATION REQUIRED

ELEV 6451	TDZE 6431
CL Rwy 1-19	
HIRL Rwy 1-19	

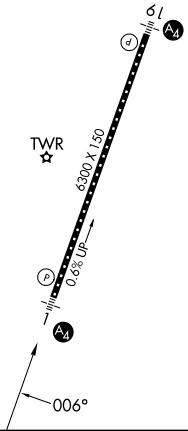

NW-1, 04 SEP 2025 to 02 OCT 2025

NW-1, 04 SEP 2025 to 02 OCT 2025