

WAAS
CH **58299**
W01A

APP CRS
006°

Rwy Ldg
TDZE **6431**
Apt Elev **6451**

RNAV (GPS) X RWY 1
JACKSON HOLE (JAC)

RNP APCH-GPS.

▼

▲

⊞

Circling NA east of Rwy 1-19. Baro-VNAV NA.
Circling NA for Cat D. Inop table does not apply to LPV, LPV*, LNAV/VNAV, and LNAV Cat C/D.


MALS

≡

A2

MISSED APPROACH: Climb to 14000 direct QUIRT and on track 088° to DNW VOR/DME and hold, continue climb-in-hold to 14000.
*Missed approach requires minimum climb of 385 feet per NM to 7700.

D-ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF) 0	GND CON 124.55	UNICOM 122.95
--------------------------	---	---	--------------------------	-------------------------

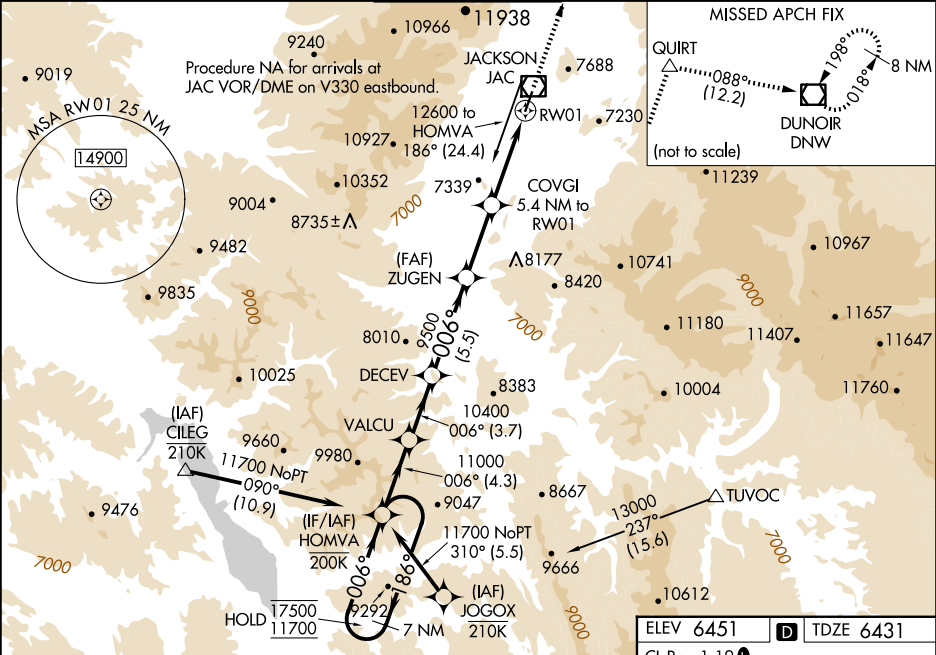

HOMVA
7 NM
Holding Pattern

VALCU

DECEV

ZUGEN

COVGI
5.4 NM to
RW01

3.4 NM to
RW01

RW01

14000

QUIRT

tr
088°

DNW

17500 ← 186°

11700 → 006°

GP 3.00°

TCH 50

4.3 NM

3.7 NM

5.5 NM

4.1 NM

2.1 NM

3.4

CATEGORY	A	B	C	D
LPV DA*	6651/40 220 (200-¾)			
LPV DA	7445-4 1014 (1000-4)			
LNAV/VNAV DA	7327-4 896 (900-4)			
LNAV MDA	7540/55 1109 (1100-1)	7540-1¼ 1109 (1100-1¼)	7540-3 1109 (1100-3)	
CIRCLING	7540-1¼ 1089 (1100-1¼)	7540-1½ 1089 (1100-1½)	7560-3 1109 (1200-3)	NA

ELEV 6451

D

TDZE 6431

CL Rwy 1-19

HIRL Rwy 1-19

TWR

6300 X 150

088° UP

006°