

WAAS CH 82437 W16A	APP CRS 163°	Rwy Ldg TDZE 7289 Apt Elev 7289
--	------------------------	---

RNAV (GPS) RWY 16


KEMMERER MUNI (EMM)

⚠

Baro-VNAV NA when using Evanston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA when using Evanston altimeter setting. Night landing: Rwy 4, 10, 22, 28 NA. When local altimeter setting not received, use Evanston altimeter setting: Increase all DA 111 feet and visibilities ¼ mile; increase all MDA 120 feet.

MISSED APPROACH:
Climb to 10000 direct
ILUME and hold.

AWOS-3PT 119.675	SALT LAKE CITY CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

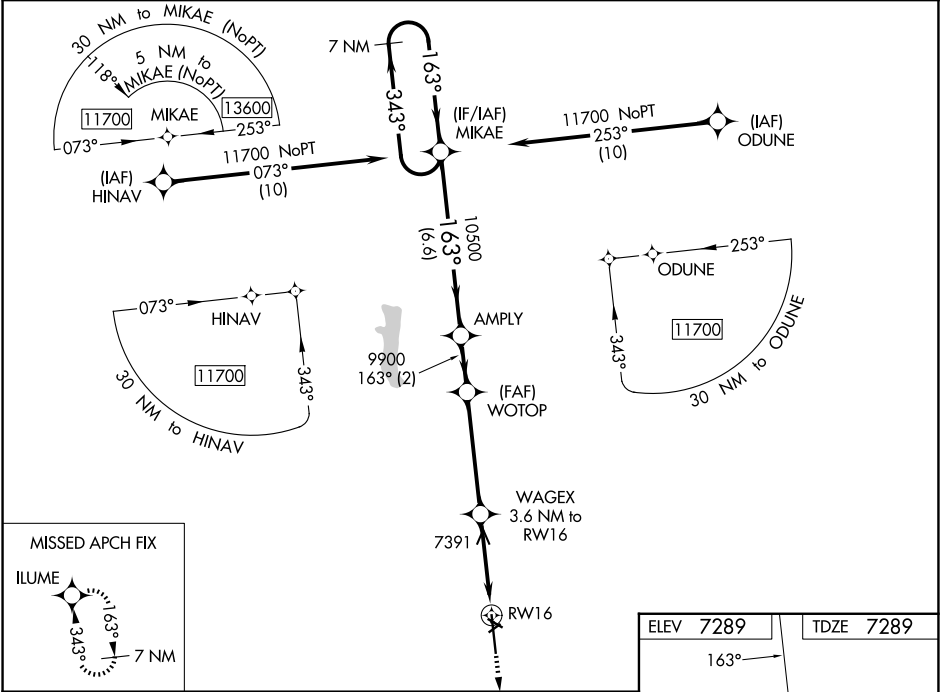

7 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 34).		10000	ILUME
11700		AMPLY		*LNAV only.	
GP 3.00°		WOTOP		*1 NM to RW16	
TCH 34		9900		RW16	
		*8480			
		6.6 NM		2 NM	
				4.5 NM	
				2.6 NM	
				1 NM	
CATEGORY		A	B	C	D
LPV DA		7539-1	250 (300-1)		NA
LNAV/VNAV DA		7539-1	250 (300-1)		NA
LNAV MDA		7660-1	371 (400-1)		NA
CIRCLING		7660-1	8240-1½		NA
		371 (400-1)	951 (1000-1½)		

