


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>53324</b><br><b>W24A</b> | APP CRS<br><b>241°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5001</b><br><b>1082</b><br><b>1084</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 24

TULLAHOMA RGNL/WM NORTHERN FLD (THA)

|                                                                                                                                                                                                                                                  |  |                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                                                                                  |  | MISSED APPROACH:<br>Climb to 3000 direct<br>EXEGE and hold. |
| <div><div></div><div></div></div> <div>Circling NA to Rws 9 and 27. Circling Rwy 18 and 36 NA at night. Rwy 24 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 37°C.</div> |  |                                                             |

|                          |                                         |                                 |
|--------------------------|-----------------------------------------|---------------------------------|
| AWOS-3<br><b>128.325</b> | MEMPHIS CENTER<br><b>128.15 323.125</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|-----------------------------------------|---------------------------------|

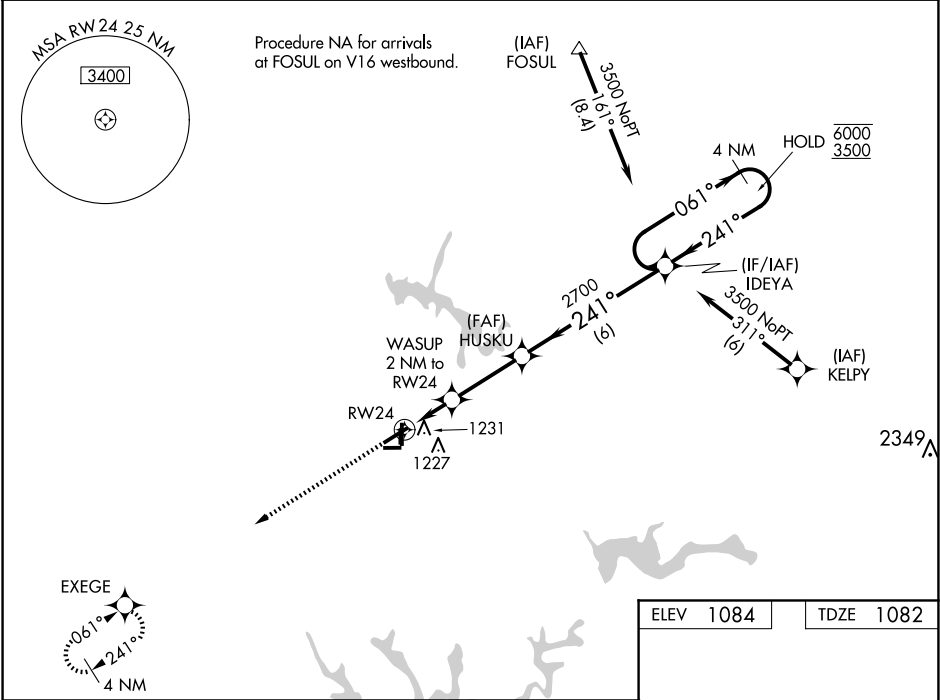

|              |                       |                                                                  |                         |                       |          |                      |
|--------------|-----------------------|------------------------------------------------------------------|-------------------------|-----------------------|----------|----------------------|
| 3000         | EXEGE                 | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 33). |                         |                       |          | 4 NM Holding Pattern |
|              |                       | 1.2 NM to RW24                                                   | 0.9 NM                  | 2.9 NM                | 6 NM     |                      |
|              |                       | 1760                                                             | 2700                    | 2700                  | 6000     | 3500                 |
|              |                       |                                                                  |                         |                       | GP 3.00° | TCH 45               |
| CATEGORY     | A                     | B                                                                | C                       | D                     |          |                      |
| LPV DA       |                       | 1332-1                                                           | 250 (300-1)             |                       |          |                      |
| LNAV/VNAV DA |                       | 1400-1                                                           | 318 (400-1)             |                       |          |                      |
| LNAV MDA     | 1500-1                | 418 (500-1)                                                      | 1500-1½                 | 418 (500-1½)          |          |                      |
| CIRCLING     | 1540-1<br>456 (500-1) | 1580-1<br>496 (500-1)                                            | 1620-1½<br>536 (600-1½) | 1640-2<br>556 (600-2) |          |                      |

