

RNAV (GPS) RWY 4

WAAS CH 41172 W04A	APCH CRS 038°	Rwy Idg TDZE Arpt Elev	10,001 4284 4295
--------------------------	------------------	------------------------------	------------------------


(USAF)

CANNON AFB (KCVS)



▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile. ** When ALS inop increase RVR to 60 vis to 1 1/8 miles. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles.	ALSF-1 	MISSED APPROACH: Climb to 7000 direct FETEP, then track to HEKDI and hold.
---	---	---

ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225
---------------------	---------------------------------	-----------------------	------------------------	---------------------------

DME/DME RNP-0.3 NA
For uncompensated Baro-VNAV systems, Procedure NA below 7°C (45°F) or above 54°C (130°F).

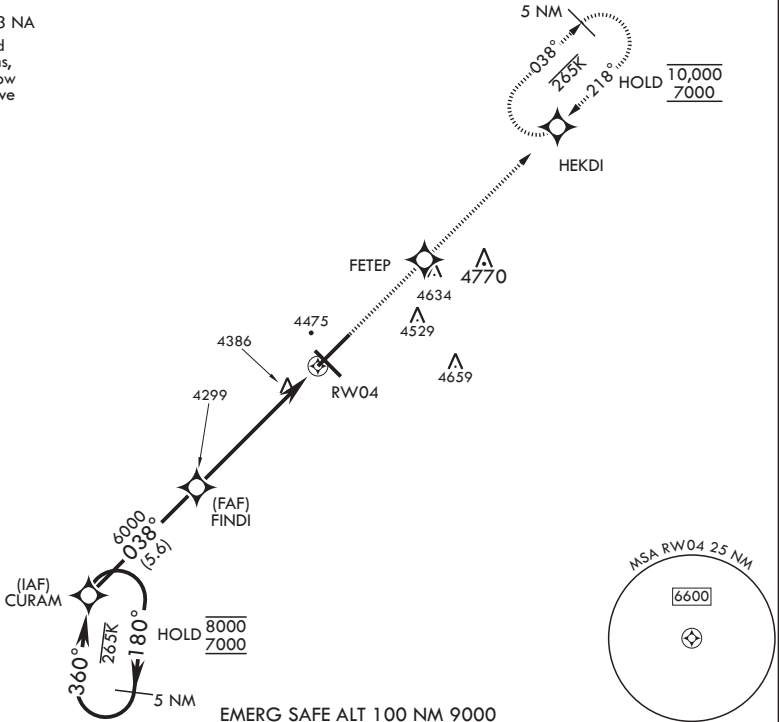

5 NM Holding Pattern CURAM	VGSi and RNAV glidepath not coincident (VGSi angle 2.50/TCH 41°).	7000	FETEP	ELEV 4295	TDZE 4284
----------------------------	---	------	-------	-----------	-----------

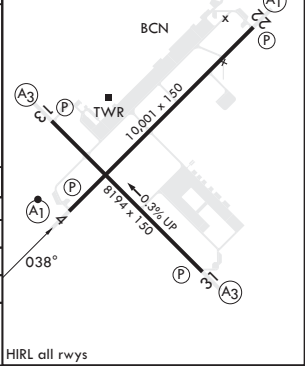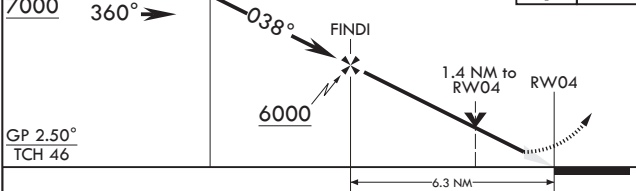

CATEGORY	A	B	C	D	E
LPV DA*	4484/24	200	(200-1/2)		
LNAV/VNAV DA**	4700/40	416	(500-3/4)		
LNAV MDA***	4700/24 416 (500-1/2)	4700/40 416 (500-3/4)			
CIRCLING	4840-1 545 (600-1)	4840-1 1/2 545 (600-1 1/2)	4980-2 1/4 685 (700-2 1/4)	5020-2 1/2 725 (800-2 1/2)	

RNAV (GPS) RWY 4

SW-1, 04 SEP 2025 to 02 OCT 2025

SW-1, 04 SEP 2025 to 02 OCT 2025